

Interlace

Technical Specifications

Collection Name	Interlace
Yarn	Nexlon™ + Quartz Premium Solution Dyed Nylon with Stain & Soil Resist Technology
Construction	Hi / Mid / Lo Loop
Dye Method	Solution Dyed
Gauge	1/12 inch
Stitches Per Inch	10.3 per inch
Pile Height	5.5 / 4.5 / 3.0 mm (+/-0.5 mm)
Total Height	7.5 mm (+/-0.5 mm)
Pile Weight	16 oz/sy
Total Weight	146 oz/sy (4950 gm/sm)
Primary Backing	Non-woven
Secondary Backing	PVC
Size	50 x 50 cm/tile
Packing	20 pcs(5 sm/box)


Performance Specifications

Colorfastness	Grade ≥ 4 (AATCC 16)
Flammability	Class I (ASTM E648)
Smoke Density	Passed (ASTM E662)
Static Propensity	≤ 3.5 kV (AATCC-134)
SGBC	Leader ✓✓✓✓
Warranty	15 years

Environmental Product Declaration (EPD) certified by UL.


Health Product Declaration (HPD) Third Party verified.

Installation Method



Note:

- Product specifications are based on standard manufacturing tolerances. Slight variations may occur but will not impact performance.
- As with all quality carpets, minor color differences may appear between dye lots.
- To maintain appearance and minimize wear, the use of protective chair pads is recommended under office chairs with castor wheels.

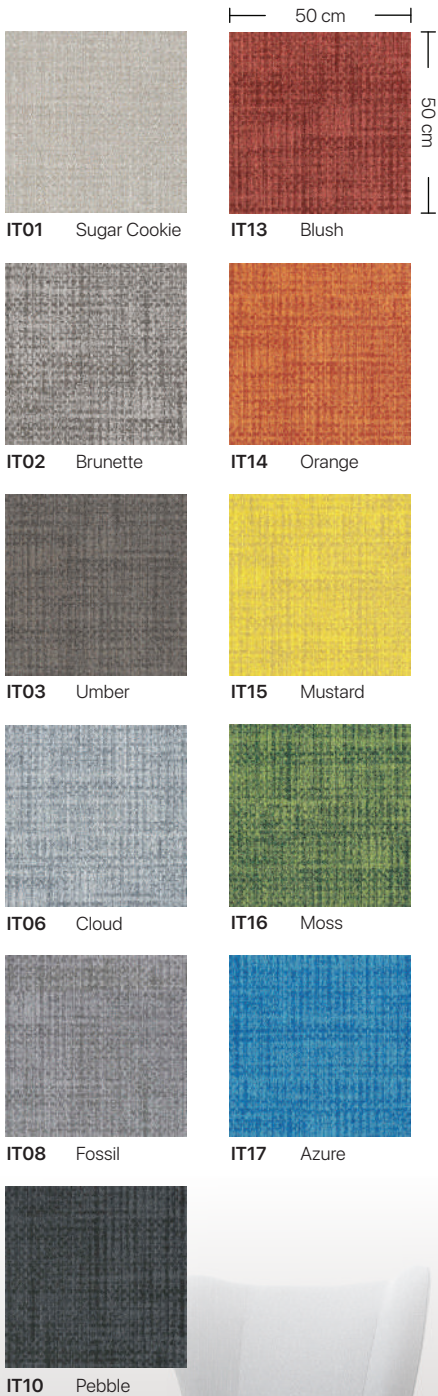

IT06 Cloud (80%) + IT17 Azure (20%) | Monolithic Installation with Cut Out Triangle

Images and renderings in this sample book are for illustration purpose and may not represent the real colour.

