
2023






BELIEVE IN BETTERTM














































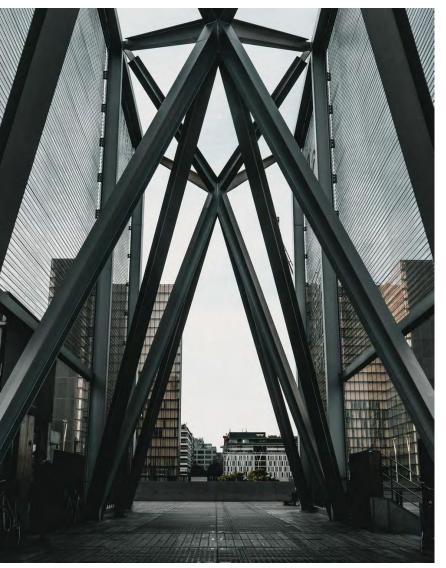





Fractal Fluency Collection



DESIGN

Product Type: Tile Construction: Tufted No Minimum Minimum SqYd:

Surface Texture: Textured Patterned Multi-Colored Loop

Gauge: 1/12 (47.24 rows per 10 cm) Tufted Pile Weight: 18 oz/yd2 (610 g/m2) Finished PileThickness: .120" (3.05 mm) Total Thickness: .249" (6.32 mm) StitchesPer Inch: 12.1 (47.64 per 10 cm)

Dye Method: Solution Dyed

Duracolor® Tricor Premium Nylon Fiber Type: Stain ReleaseTechnology: Permanent, Built into Fiber Soil Release Technology: EcoSentry Soil Treatment

5,445 97,200 Weight Density: **EcoFlex ICT** Backing Material:

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

12" x 36" (30.48 cm x 91.44 cm) Size:

Pattern Repeat: Not Applicable



535 Cornflower



545 Royal



839 Flax



929 Silver



Mineral

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down) Smoke Density: ASTM E662 Less than 450 AATCC - 134 Under 3.5 KV Static Propensity:

Foot Traffic RecommendationTARR: Heavy GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static

859

Taupe

Iron



Charcoal





Fractal Fluency Collection





535 Cornflower



859 Taupe



969 Iron



545 Royal

839

Flax

949

Mineral



929 Silver



989 Charcoal

DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

 Gauge:
 1/12 (47.24 rows per 10 cm)

 Tufted Pile Weight:
 18 oz/yd2 (610 g/m2)

 Finished PileThickness:
 .120" (3.05 mm)

 Total Thickness:
 .249" (6.32 mm)

 StitchesPer Inch:
 12.1 (47.64 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Treatment

 Density:
 5,184

 Weight Density:
 97,200

 Backing Material:
 EcoFlex ICT

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

Size: 12" x 36" (30.48 cm x 91.44 cm)

Pattern Repeat: Not Applicable

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down)

Smoke Density: ASTM E 662 Less than 450

Static Propensity: AATCC - 134 Under 3.5 KV

Foot Traffic RecommendationTARR: Heavy
GSA Stain Release Rating: Pass

SERVICE



BA470 Visual Connections

Mohawk Group

Timeless Tailored Collection





535 Cornflower



859 Taupe



969 Iron



545 Royal

839

Flax

949

Mineral



929 Silver



989 Charcoal

DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

 Gauge:
 1/12 (47.24 rows per 10 cm)

 Tufted Pile Weight:
 18 oz/yd2 (610 g/m2)

 Finished PileThickness:
 .120" (3.05 mm)

 Total Thickness:
 .249" (6.32 mm)

 StitchesPer Inch:
 13.5 (51.35 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Treatment

 Density:
 6,893

 Weight Density:
 97,200

 Backing Material:
 EcoFlex ICT

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

Size: 12" x 36" (30.48 cm x 91.44 cm)

Pattern Repeat: Not Applicable

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down)

Smoke Density: ASTM E 662 Less than 450

Static Propensity: AATCC - 134 Under 3.5 KV

Foot Traffic Recommendation TARR: Heavy
GSA Stain Release Rating: Pass

SERVICE



Timeless Tailored Collection





535 Cornflower



859 Taupe



969 Iron



545 Royal

839

Flax

949

Mineral



929 Silver



DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

 Gauge:
 1/12 (47.24 rows per 10 cm)

 Tufted Pile Weight:
 19 oz/yd2 (644 g/m2)

 Finished PileThickness:
 .120" (3.05 mm)

 Total Thickness:
 .249" (6.32 mm)

 StitchesPer Inch:
 13.9 (54.72 per 10 cm)

Dye Method: Solution Dyed
Fiber Type: Duracolor® Trice

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Treatment

 Density:
 6,000

 Weight Density:
 97,200

 Backing Material:
 EcoFlex ICT

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

Size: 12" x 36" (30.48 cm x 91.44 cm)

Pattern Repeat: Not Applicable

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down)

Smoke Density: ASTM E 662 Less than 450

Static Propensity: AATCC - 134 Under 3.5 KV

Foot Traffic RecommendationTARR: Heavy
GSA Stain Release Rating: Pass

SERVICE





Timeless Tailored Collection





535 Cornflower



859 Taupe



969



545 Royal

839

Flax

949

Mineral



929 Silver



Charcoal

DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

 Gauge:
 1/12 (47.24 rows per 10 cm)

 Tufted Pile Weight:
 19 oz/yd2 (644 g/m2)

 Finished PileThickness:
 .120" (3.05 mm)

 Total Thickness:
 .249" (6.32 mm)

 StitchesPer Inch:
 13.9 (54.72 per 10 cm)

 Dye Method:
 Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Treatment

 Density:
 6,000

 Weight Density:
 97,200

 Backing Material:
 EcoFlex ICT

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

Size: 12" x 36" (30.48 cm x 91.44 cm)

Pattern Repeat: Not Applicable

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down)

Smoke Density: ASTM E 662 Less than 450

Static Propensity: AATCC - 134 Under 3.5 KV

Foot Traffic Recommendation TARR: Heavy
GSA Stain Release Rating: Pass

SERVICE





Optic Reset Collection



DESIGN

Product Type: Tile Construction: Tufted No Minimum Minimum SqYd:

Textured Patterned Multi-Colored Loop Surface Texture:

Gauge: 1/12 (47.00 rows per 10 cm) Tufted Pile Weight: 18 oz/yd2 (610 g/m2) Finished PileThickness: .128" (3.25 mm) Total Thickness: .245" (6.22 mm) StitchesPer Inch: 12.3 (48.43 per 10 cm)

Dye Method: Solution Dyed

Duracolor® Tricor Premium Nylon Fiber Type: Stain ReleaseTechnology: Permanent, Built into Fiber EcoSentry Soil Treatment Soil Release Technology:

5,062 91,125 Weight Density: Backing Material: **EcoFlex ICT**

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

12" x 36" (30.48 cm x 91.44 cm) Size:

Pattern Repeat: Not Applicable

Fresco Light



Indigo Light



Verdigris Light



868 Nuance Light



Ferro Light



Moonlit Light



Silhouette Light



Cinematic Light



Undertone Light

SUSTAINABILITY

Declare Label:

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor Air Quality: CRI Green Label Plus GLP1171

Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down) Smoke Density: ASTM E662 Less than 450 AATCC - 134 Under 3.5 KV Static Propensity:

Foot Traffic RecommendationTARR: Heavy GSA Stain Release Rating: Pass

SERVICE

Warranties:



Optic Reset Collection



DESIGN

Product Type: Tile Construction: Tufted No Minimum Minimum SqYd:

SurfaceTexture: Textured Patterned Multi-Colored Loop

Gauge: 1/12 (47.00 rows per 10 cm) Tufted Pile Weight: 18 oz/yd2 (610 g/m2) Finished PileThickness: .120" (3.05 mm) Total Thickness: .249" (6.32 mm) StitchesPer Inch: 12.1 (47.64 per 10 cm)

Dye Method: Solution Dyed

Duracolor® Tricor Premium Nylon Fiber Type: Permanent, Built into Fiber Stain Release Technology: EcoSentry Soil Treatment Soil Release Technology:

5,400 97,200 Weight Density: Backing Material: **EcoFlex ICT**

Installation Method: Half Lap, BrickAshlar, Random, Herringbone

12" x 36" (30.48 cm x 91.44 cm) Size:

Pattern Repeat: Not Applicable

282 Fresco Dark



Indigo Dark



Verdigris Dark



Nuance Dark



957 Ferro Dark



959 Moonlit Dark



Silhouette Dark



Cinematic Dark



Undertone Dark

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171 Declare Label:

Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down) Smoke Density: ASTM E662 Less than 450 AATCC - 134 Under 3.5 KV Static Propensity:

Foot Traffic RecommendationTARR: Heavy GSA Stain Release Rating: Pass

SERVICE

Warranties:

^{*} China available color highlighted in red



BA448 Shifted Focus Tile 12BY36

Mohawk Group

Optic Reset Collection



DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

 Gauge:
 1/12 (47.00 rows per 10 cm)

 Tufted Pile Weight:
 18 oz/yd2 (610 g/m2)

 Finished PileThickness:
 .138" (3.51 mm)

 Total Thickness:
 .254" (6.45 mm)

 StitchesPer Inch:
 12.4 (48.82 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Treatment

 Density:
 4,695

 Weight Density:
 84,521

 Backing Material:
 EcoFlex ICT

Installation Method: Brick Ashlar, Random, Half Lap, Plank Half Lap, Basket Weave, Herringbone

Size: 12" x 36" (30.48 cm x 91.44 cm)

Pattern Repeat: Not Applicable

282 Fresco



585 Indigo



696 Verdigris



868 Nuance



957 Ferro



959 Moonlit



979 Silhouette



987 Cinematic



988 Undertone

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class I (Glue Down)
Smoke Density: ASTM E 662 Less than 450
Static Propensity: AATCC - 134 Under 3.5 KV

Foot Traffic RecommendationTARR: Heavy
GSA Stain ReleaseRating: Pass

SERVICE

^{*} China available color highlighted in red





DI	<u>ES</u>	IG	N
Pr	od	uc	t ·

Dye Method:

Type: Tile Construction: Tufted $No\,Minim\,um$ Minimum Sq Yd:

Surface Texture: Textured Patterned Loop Gauge: 1/12 (47.00 rows per 10 cm) Tufted Pile Weight: 20 oz/yd2 (678 g/m2) Finished Pile Thickness: .123" (3.12 mm)

Stitches Per Inch: 10.8 (45.52 per 10 cm)

Solution Dyed

Duracolor® Tricor Premium Nylon Fiber Type:

Fiber Technology: Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent

stain resistant carpet.

Permanent, Built into Fiber Stain Release Technology: Soil Release Technology: **EcoSentry Soil Protection**

Density: 5,853 117,073 Weight Density: EcoFlex ICT Backing Material:

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Installation Method:

12" x 36" (.3048 m x .9144 m) Size:

Pattern Repeat: Not Applicable



Sunlight

Filtered





373 Atomic

Mystic



Blossom



545 Aquarius





Electric

SUSTAINABILITY

NSF 140: EcoFlex ICT- NSF 140 Gold Indoor Air Quality: CRI Green Label Plus GLP1171 Declare Label: Declared Red List Free

PERFORMANCE


Flammability: ASTM E 648 Class 1 (Glue Down) ASTM E662 Less than 450 Smoke Density: Static Propensity: AATCC-134 Under 3.5 KV

Foot Traffic Recommendation TARR: Severe GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Static, Lifetime Duracolor Stain Warranty

^{*} China available color highlighted in red

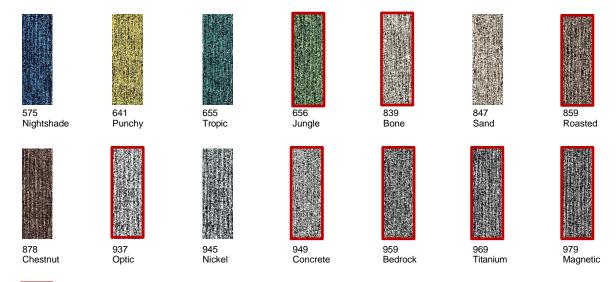



989 Shadow

^{*} China available color highlighted in red





Nutopia Matrix Collection





Compose





945

Captivate

Connect



878 Essential

937

Serene

Fusion



Idyllic



* China available color highlighted in red

DESIGN

Tufted Pile Weight: 20 oz/yd2 (678 g/m2)

Product Type: Tile Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 7,128 Weight Density: 142,574

Stitches Per Inch: 12.6 (49.61 per 10 cm)

Finished Pile Thickness: .101" (2.57 mm) Dye Method: Solution Dyed Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent

stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (30.48 cm x 91.44cm)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method: Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **Sentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:


SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: Limited Duracolor Stain Warranty, Lifetime Static





Nutopia Matrix Collection

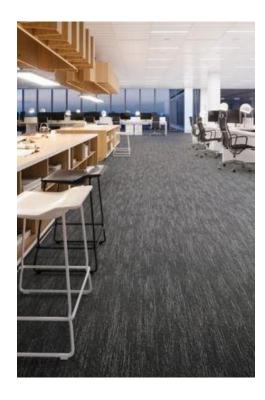



839 Compose



878 Essential



937 Serene

Fusion



945 Captivate

Connect



959 Idyllic



989 Intrigue

DESIGN

Tufted Pile Weight: 20 oz/yd2 (678 g/m2)

Product Type: Tile

Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: Textured Patterned Loop

Gauge: 1/12(47.00 rows per 10 cm)

 Density:
 7,058

 Weight Density:
 141,176

Stitches Per Inch:

12.2 (48.03 per 10 cm
Finished Pile Thickness:

.102" (2.59 mm)

Dye Method:

Solution Dyed

Backing Material:

EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System, Passes GSA requirements for permanent

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

Size: 12" x 36" (30.48 cm x 91.44cm)

Installation Method: Brick Ashlar, Basket Weave, Plank Half Lap,

Random, Herringbone

GSA Stain Release Rating: Pass

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: Sentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - NSF 140 Gold


Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV
Flammability: ASTM E 648 Class 1(Glue Down)
Smoke Density: ASTM E 662 Lessthan 450

SERVICE

^{*} China available color highlighted in red

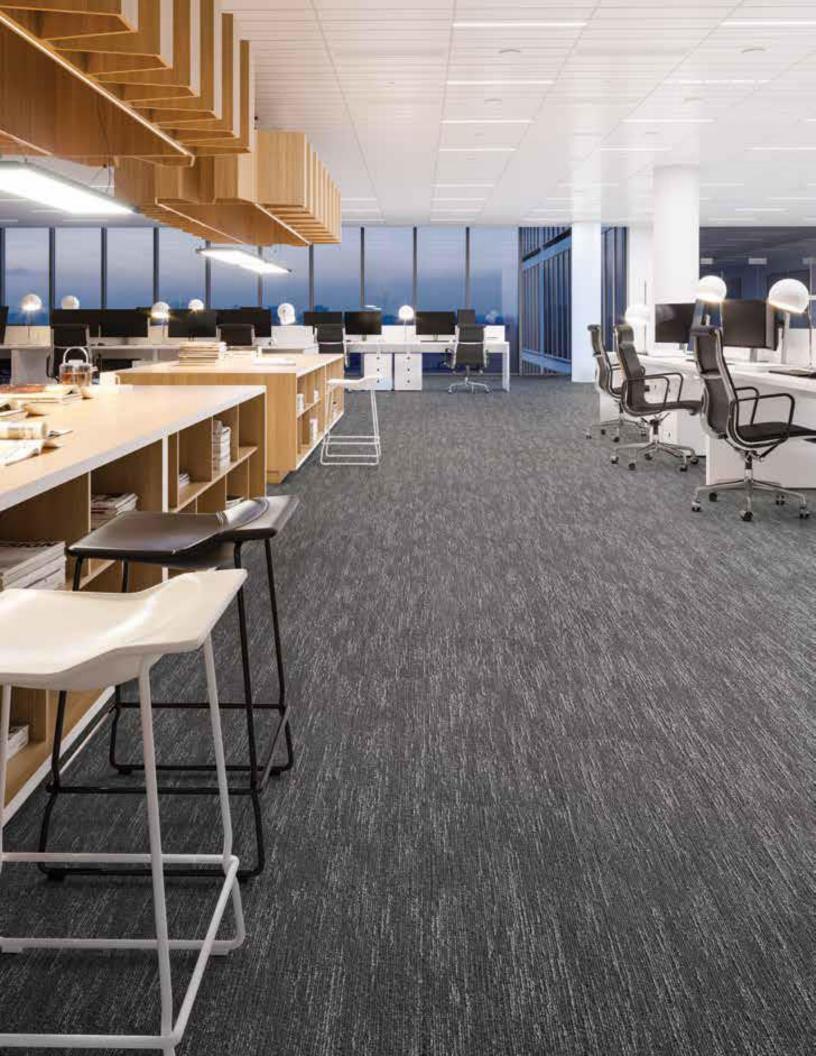



GT484 Color Canvas

Mohawk Group

Social Canvas Collection





Atmosphere



537 Freshwater



Reflection



959 Sidewalk



535 Denim



Greenbelt



Cityscape



969 Pathway



545 Celestial



839 Nest



958 Dovetail



DESIGN

Tufted Pile Weight: 19 oz/yd2 (644 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 5,044 Weight Density: 226.285

Stitches Per Inch: 12.8 (50.39 per 10 cm) Finished Pile Thickness: .102" (2.59 mm) Dye Method: **Solution Dyed**

Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology: System. Passes GSA requirements for permanent

stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method: Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: Limited Duracolor Stain Warranty, Lifetime Static



GT483 Creative Culture

Mohawk Group

Social Canvas Collection









729 Titanium



989 Charcoal



935 Mineral



829 Sisal



938 Pumice



967 Granite

DESIGN

Tufted Pile Weight: 22 oz/yd2 (746 g/m2)

Product Type: Tile

Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

Gauge: 1/12 (47.00 rows per 10 cm)

 Density:
 5,044

 Weight Density:
 226,285

Stitches Per Inch: 13.5 (53.15 per 10 cm)
Finished Pile Thickness: 103" (3.50 per 10 cm)

Finished Pile Thickness: .102" (2.59 mm)

Dye Method: Solution Dyed

Backing Material: EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System, Passes GSA requirements for permanent

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

Size: 12" x 36" (.3048 m x .9144 m)

Installation Method: Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating: Pass

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - NSF 140 Gold

Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV
Flammability: ASTM E 648 Class 1 (Glue Down)
Smoke Density: ASTM E 662 Less than 450

SERVICE



GT479 Uplifting Others

Mohawk Group

Social Canvas Collection





Flow State



829 Gallery



Portrait



935 Creative Soul



936

Fresh Paint

Portfolio



True Self

DESIGN

Tufted Pile Weight: 24 oz/yd2 (814 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 7,322 Weight Density: 226,285

Stitches Per Inch: 9.17 (36.09 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method:

Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE



GT480 Breaking Boundaries

Mohawk Group

Social Canvas Collection





535 Flow State



937 Gallery



938 Portrait



935 Creative Soul

936

Fresh Paint

Portfolio



829 Journal



729 True Self

DESIGN

Tufted Pile Weight: 25 oz/yd2 (848 g/m2)

Product Type: Tile

Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: Textured Patterned Multi-Colored Loop

Gauge: 1/12 (47.00 rows per 10 cm)

Density: **7,258**Weight Density: **226,285**

Stitches Per Inch: 9.17 (36.09 per 10 cm)
Finished Pile Thickness: 123" (24.3 mm)

Finished Pile Thickness: .123" (3.12 mm)

Dye Method: Solution Dyed

Backing Material: EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System, Passes GSA requirements for permanent

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method:

Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating: Pass

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - NSF 140 Gold

Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV
Flammability: ASTM E 648 Class 1 (Glue Down)
Smoke Density: ASTM E 662 Less than 450

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime
Limited Duracolor Stain Warranty, Lifetime Static



GT481 Art Therapy

Mohawk Group

Social Canvas Collection





Flow State



Gallery



Portrait



Creative Soul

936

Fresh Paint

Portfolio



Journal



True Self

DESIGN

Tufted Pile Weight: 25 oz/yd2 (848 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 7,692 Weight Density: 226,285

Stitches Per Inch: 9 (35.43 per 10 cm) Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent

stain resistant carpet. Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method:

Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE



GT482 Space For All

Mohawk Group

Social Canvas Collection





535 Flow State



937 Gallery



Portrait



Creative Soul

936

Fresh Paint

Portfolio



829 Journal



True Self

DESIGN

Tufted Pile Weight: 25 oz/yd2 (848 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.:

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 7,377 Weight Density: 226,285

Stitches Per Inch: 9.17 (36.09 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

No Minimum

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method:

Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE



GT425 Fractal Ground Tile 12BY36

Mohawk Group

Relaxing Floors Collection





Focus



Easy Breezy



Pause



Sanctuary

Awakening

Blue Bliss



Harmony





Tufted Pile Weight: 22 oz/yd2 (746 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 10,285 Weight Density: 226,285

Stitches Per Inch: 28.5 (112.20 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent

stain resistant carpet. Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method:

Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE



Relaxing Floors Collection






Focus



Harmony

Easy Breezy

Pause





922 Sanctuary



Awakening



Blue Bliss

DESIGN

Tufted Pile Weight: 23 oz/yd2 (780 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.:

No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 9,409 Weight Density: 216.409

Stitches Per Inch: 28.5 (112.20 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method: Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY


IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE

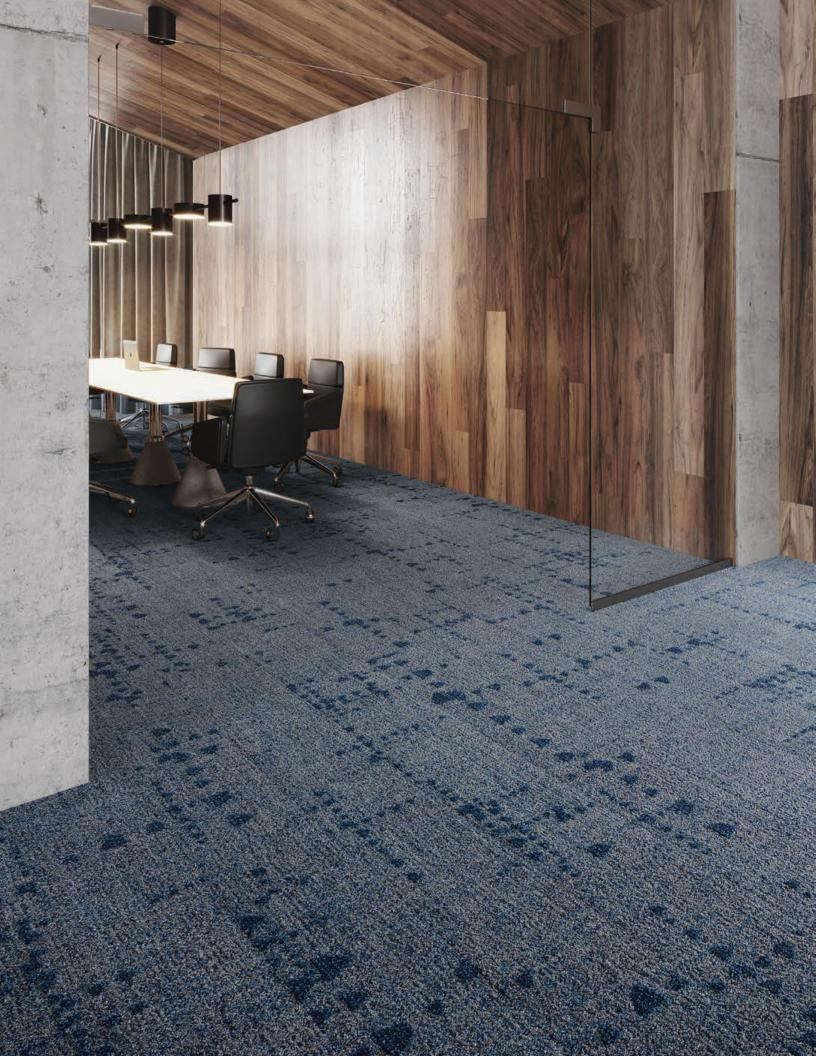



Relaxing Floors Collection





829 Focus



Harmony

Sanctuary

949 Easy Breezy



967 969 Pause Solitude



946 Awakening



965 Blue Bliss

DESIGN

Tufted Pile Weight: 23 oz/yd2 (780 g/m2)

Product Type: Tile

Construction: Tufted

Minimum Sq. Yd.: No Min

Surface Texture: Textured Patterned Multi-Colored Loop

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 9,098
Weight Density: 209,274

Stitches Per Inch: 28.5 (112.20 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm)

Dye Method: Solution Dyed

Backing Material: EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System, Passes GSA requirements for permanent

No Minimum

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

Size: 12" x 36" (.3048 m x .9144 m)

Installation Method: Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating: Pas

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - NSF 140 Gold

Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV
Flammability: ASTM E 648 Class 1 (Glue Down)
Smoke Density: ASTM E 662 Less than 450

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static





Relaxing Floors Collection





Focus



Harmony

Easy Breezy

Pause





922 Sanctuary



946 Awakening



Blue Bliss

DESIGN

Tufted Pile Weight: 22 oz/yd2 (746 g/m2)

Tile Product Type: Construction: Tufted Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Multi-Colored Loop**

Gauge: 1/12 (47.00 rows per 10 cm)

Density: 10,025 Weight Density: 220,556

Stitches Per Inch: 28.5 (112.20 per 10 cm)

Finished Pile Thickness: .123" (3.12 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

System. Passes GSA requirements for permanent

stain resistant carpet.

Pattern Repeat: **Not Applicable**

Size: 12" x 36" (.3048 m x .9144 m)

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Installation Method: Plank Half Lap, Monolithic Stepping, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - NSF 140 Gold

Declared Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE







Nutopia 2.0 Collection



DESIGN

Product Type: Tile Construction: Tufted No Minimum Minimum SqYd:

Surface Texture: Textured Patterned Loop Gauge: 1/12 (47.00 rows per 10 cm) Tufted Pile Weight: 20 oz/yd2 (678 g/m2) Finished PileThickness: .100" (2.54 mm) StitchesPer Inch: 11.5 (45.28 per 10 cm)

Dye Method: Solution Dyed

Duracolor® Tricor Premium Nylon Fiber Type:

Fiber Technology: Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent

stain resistant carpet.

Permanent, Built into Fiber Stain Release Technology: Soil Release Technology: **EcoSentry SoilTreatment**

Density: 7,200 Weight Density: 144,000 EcoFlex ICT Backing Material:

Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Installation Method:

12" x 36" (.3048 m x .9144 m) Size:

Pattern Repeat: Not Applicable

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor Air Quality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class 1(Glue Down) ASTM E662 Less than 450 Smoke Density: Static Propensity: AATCC-134 Under 3.5 KV

Foot Traffic Recommendation TARR: Heavy GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static











Nutopia 2.0 Collection



DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

Surface Texture: Textured Patterned Loop
Gauge: 1/12 (47.00 rows per 10 cm)
Tufted Pile Weight: 24 oz/yd2 (814 g/m2)
Finished PileThickness: .123" (3.12 mm)

 Finished Pile I hickness:
 .123" (3.12 mm)

 Total Thickness:
 .241" (6.12 mm)

 StitchesPer Inch:
 9.5 (37.40 per 10 cm)

 Dye Method:
 Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Density: 8,280
Weight Density: 190,440
Backing Material: EcoFlex ICT

Installation Method: Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone

Lap, Herringbone

 Size:
 12" x 36" (.3048 m x .9144 m)

 Pattern Repeat:
 Not Applicable

ratteriffepeat.

SUSTAINABILITY

NSF 140: EcoFlex ICT - NSF 140 Gold
Indoor AirQuality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class 1 (Glue Down)

Smoke Density: ASTM E 662 Less than 450

Static Propensity: AATCC-134 Under 3.5 KV

Foot Traffic RecommendationTARR: Severe
GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime Limited Duracolor Stain Warranty, Lifetime Static







989 Pavement





Nutopia 2.0 Collection







889 Archway



975 Riverside



Neighborhood



945 Skyway



985 Metroscape



867 Uptown

869

Landmark

Metropolis



956 Green Space



DESIGN

Product Type: Tile

Construction: Tufted

Minimum SqYd: No Minimum

 Surface Texture:
 Textured Patterned Loop

 Gauge:
 1/12 (47.00 rows per 10 cm)

 Tufted Pile Weight:
 23 oz/yd2 (780 g/m2)

 Finished Pile Thickness:
 .100" (2.54 mm)

 Total Thickness:
 .279" (7.09 mm)

 Stitches Per Inch:
 10.0 (39.37 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Density: 8,280
Weight Density: 190,440
Backing Material: EcoFlex ICT

Installation Method: Half Lap, Brick Ashlar, Basket Weave, Plank Half

Lap, Herringbone 12" x 36" (.3048 m x .9144 m)

Pattern Repeat: Not Applicable

SUSTAINABILITY

Size:

NSF 140: EcoFlex ICT - NSF 140 Gold
Indoor AirQuality: CRI Green Label Plus GLP1171
Declare Label: Declared

eclare Label: Declared

PERFORMANCE

Flammability: ASTM E 648 Class 1 (Glue Down)
Smoke Density: ASTM E 662 Less than 450
Static Propensity: AATCC-134 Under 3.5 KV
Foot Traffic Recommendation TARR: Severe

Foot Traffic Recommendation TARR: Seve

GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime





Nutopia 2.0 Collection





Bridge



Archway



Riverside



Neighborhood



Skyway



Metroscape



Uptown

Landmark

959

Metropolis



Green Space



Darklands

DESIGN

Dye Method:

Product Type: Tile Construction: Tufted $No\,Minimum$ Minimum SqYd:

Textured Patterned Loop Surface Texture: Gauge: 1/12 (47.00 rows per 10 cm) Tufted Pile Weight: 23 oz/yd2 (780 g/m2) Finished PileThickness: .110" (2.79 mm) Total Thickness: .263" (6.68 mm) StitchesPer Inch: 10.5 (41.34 per 10 cm)

Duracolor® Tricor Premium Nylon Fiber Type: Stain ReleaseTechnology: Permanent, Built into Fiber

EcoSentry Soil Protection Soil Release Technology:

7,527 173,127 Weight Density: EcoFlex ICT Backing Material:

Installation Method: Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone

Solution Dyed

12" x 36" (.3048 m x .9144 m)

Pattern Repeat: Not Applicable

SUSTAINABILITY

Size:

NSF 140: EcoFlex ICT - NSF 140 Gold Indoor Air Quality: CRI Green Label Plus GLP1171

Declare Label: Declared

PERFORMANCE

ASTM E 648 Class 1(Glue Down) Flammability: ASTM E662 Less than 450 Smoke Density: Static Propensity: AATCC-134 Under 3.5 KV Foot Traffic Recommendation TARR: Severe

GSA Stain Release Rating: Pass

SERVICE

Warranties:



BA472 Stone Community

Mohawk Group

Lichen Community Collection





949 Stone

DESIGN

Tufted Pile Weight: 24 oz/yd2 (814 g/m2)

Product Type: Tile
Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: Textured Patterned Loop
Gauge: 1/12(47.00 rows per 10cm)

Density: **6,595**Weight Density: **266,264**

Stitches Per Inch: 10.1 (39.76 per 10 cm)
Finished Pile Thickness: 10.1 (39.76 per 10 cm)

Finished Pile Thickness: .106" (2.69 mm)

Dye Method: Solution Dyed

Backing Material: EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System, Passes GSA requirements for permanent

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

ize: 12" x 36" (.3048 m x .9144 m)

Installation Method: Monolithic, Monolithic Stepping, Plank Half Lap,
Basket Weave, Half Lap, Brick Ashlar, Random,

Herringbone

GSA Stain Release Rating: Pass

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Foot Traffic Recommendation TARR: Heavy

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - 140 Gold

Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV
Flammability: ASTM E 648 Class 1(Glue Down)
Smoke Density: ASTM E 662 Lessthan 450

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime
Duracolor Stain Warranty, Lifetime Static



BA473 Bark Community

Mohawk Group

Lichen Community Collection





858 Bark

DESIGN

Tufted Pile Weight: 24 oz/yd2 (814 g/m2)

Product Type: Tile
Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: Textured Patterned Loop

Gauge: 1/12(47.00 rows per 10cm)

Density: **6,595**Weight Density: **266,264**

Stitches Per Inch: 9.4 (37.01 per 10 cm)
Finished Pile Thickness: .106" (2.69 mm)

Dye Method: Solution Dyed
Backing Material: EcoFlex ICT

Fiber Type: Duracolor® Tricor Premium Nylon

Duracolor® by Mohawk Group's Stain Resistant
Fiber Technology: System. Passes GSA requirements for permanent

System. Passes GSA requirements for permanent stain resistant carpet.

Pattern Repeat: Not Applicable

ize: 12" x 36" (.3048 m x .9144 m)

Installation Method: Monolithic, Monolithic Stepping, Plank Half Lap,
Basket Weave, Half Lap, Brick Ashlar, Random,

Herringbone

Herringbo

GSA Stain Release Rating: Pass

Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Foot Traffic Recommendation TARR: Heav

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171
NSF 140: EcoFlex ICT - 140 Gold

Declare Label: Declared

PERFORMANCE

Static: AATCC-134 Under 3.5 KV

Flammability: ASTM E 648 Class 1(Glue Down)

Smoke Density: ASTM E 662 Lessthan 450

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime
Duracolor Stain Warranty, Lifetime Static



Lichen Community Collection



DESIGN

Tufted Pile Weight: 25 oz/yd2 (848 g/m2)

Tile Product Type: Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 5,769 Weight Density: 266,264

Stitches Per Inch: 9.5 (37.4 per 10 cm) Finished Pile Thickness: .106" (2.69 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

 $\label{eq:continuous} \textbf{System. Passes GSA requirements for permanent}$

stain resistant carpet. Pattern Repeat: **Not Applicable**

12" x 36" (.3048 m x .9144 m)

Monolithic, Monolithic Stepping, Plank Half Lap, Installation Method:

Basket Weave, Half Lap, Brick Ashlar, Random,

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:



Gold Dust Bark



Sunburst Bark





Moonglow Bark Velvet Snow Bark

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171 NSF 140: EcoFlex ICT - 140 Gold

Declare Label: Declared



Jewel Leaf Bark



Map Rock Stone



Sky Shield Stone



Felted Fringe Stone

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE



Drifted Root Stone



Lichen Community Collection



DESIGN

Tufted Pile Weight: 24 oz/yd2 (814 g/m2)

Tile Product Type: Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 5,769 Weight Density: 266,264

Stitches Per Inch: 9.5 (37.4 per 10 cm) Finished Pile Thickness: .106" (2.69 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex ICT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology: System. Passes GSA requirements for permanent

stain resistant carpet.

Pattern Repeat: **Not Applicable**

12" x 36" (.3048 m x .9144 m)

Monolithic, Monolithic Stepping, Plank Half Lap, Installation Method: Basket Weave, Half Lap, Brick Ashlar, Random,

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:



Gold Dust Bark



Sunburst Bark





Moonglow Bark



Velvet Snow Bark

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171

NSF 140: EcoFlex ICT - 140 Gold

Declare Label: Declared



Jewel Leaf Bark



Map Rock Stone



Sky Shield Stone



Felted Fringe Stone

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: **Duracolor Stain Warranty, Lifetime Static**



Drifted Root Stone



GT429 Urban Model Tile 12BY36

Mohawk Group

Smart City Collection









Waterfront



Downtown

DESIGN

Product Type: Tile Construction: Tufted Minimum Sq Yd: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Tufted Pile Weight: 22 oz/yd2 (746 g/m2) Finished Pile Thickness: .127" (3.23 mm) Total Thickness: .318" (8.08 mm) Stitches Per Inch: 9.5 (37.40 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: **Duracolor® Tricor Premium Nylon** Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Density: 6,236 Weight Density: 137,196 Backing Material: **EcoFlex NXT**

Installation Method: Half Lap, Brick Ashlar, Basket Weave, Plank Half

Lap, Random, Herringbone 12" x 36" (.3048 m x .9144 m)

Pattern Repeat: **Not Applicable**

SUSTAINABILITY

Pre-Consumer Recycled Content:

EcoFlex NXT - NSF 140 Gold NSF 140: Indoor Air Quality: CRI Green Label Plus GLP1171

Declare Label: **Declared Red List Free**

PERFORMANCE

Flammability: ASTM E 648 Class 1(Glue Down) ASTM E 662 Less than 450 Smoke Density: AATCC-134 Under 3.5 KV Static Propensity:

Foot Traffic Recommendation TARR: Heavy GSA Stain Release Rating: Pass

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: Limited Duracolor Stain Warranty, Lifetime Static



Smart City Collection





922 Orange Line



961 Gold Line



946 Green Line



965 Blue Line



949 Grey Line



967 White Line

DESIGN

Product Type: Tile

Construction: Tufted

Minimum Sq Yd: No Min

Surface Texture: Textured Patterned Loop
Gauge: 1/12 (47.00 rows per 10 cm)

No Minimum

 Tufted Pile Weight:
 22 oz/yd2 (746 g/m2)

 Finished Pile Thickness:
 .128" (3.25 mm)

 Total Thickness:
 .295" (7.49 mm)

 Stitches Per Inch:
 9.5 (37.70 per 10 cm)

Dye Method: Solution Dyed

Fiber Type: Duracolor® Tricor Premium Nylon
Stain Release Technology: Permanent, Built into Fiber
Soil Release Technology: EcoSentry Soil Protection

Density: 6,187
Weight Density: 136,125
Backing Material: EcoFlex NXT

Installation Method: Half Lap, Brick Ashlar, Basket Weave, Plank Half

Lap, Random, Herringbone 12" x 36" (.3048 m x .9144 m)

Pattern Repeat: Not Applicable

SUSTAINABILITY

Pre-Consumer Recycled Content: 59%

NSF 140: EcoFlex NXT - NSF 140 Gold
Indoor Air Quality: CRI Green Label Plus GLP1171
Declare Label: Declared Red List Free

PERFORMANCE

Flammability: ASTM E 648 Class 1 (Glue Down)
Smoke Density: ASTM E 662 Less than 450
Static Propensity: AATCC-134 Under 3.5 KV

Foot Traffic Recommendation TARR: Heavy
GSA Stain Release Rating: Pass

SERVICE

Warranties: Lifetime Limited Carpet Tile Warranty, Lifetime
Limited Duracolor Stain Warranty, Lifetime Static





Lichen Collection





937 Frosted Shield



Goldspeck



Orange Sea



Everbloom



Firedot



Felt Finish



Dust Cloud

Iceland Moss

945

Silva

DESIGN

Tufted Pile Weight: 29 oz/yd2 (983 g/m2)

Product Type: Tile Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 9,321 Weight Density: 270,231

Stitches Per Inch: 9.5 (37.40 per 10 cm) Finished Pile Thickness:

.112" (2.84 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex NXT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

 $\label{eq:continuous} \textbf{System. Passes GSA requirements for permanent}$ stain resistant carpet.

Pattern Repeat: **Not Applicable**

12" x 36" (.3048 m x .9144 m)

Monolithic, Monolithic Stepping, Plank Half Lap, Installation Method: Basket Weave, Half Lap, Brick Ashlar, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171

Pre-Consumer Recycled Content:

NSF 140: EcoFlex NXT - NSF 140 Gold **Declared Red List Free** Declare Label:


PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: **Duracolor Stain Warranty, Lifetime Static**

^{*} China STOCK highlighted in red

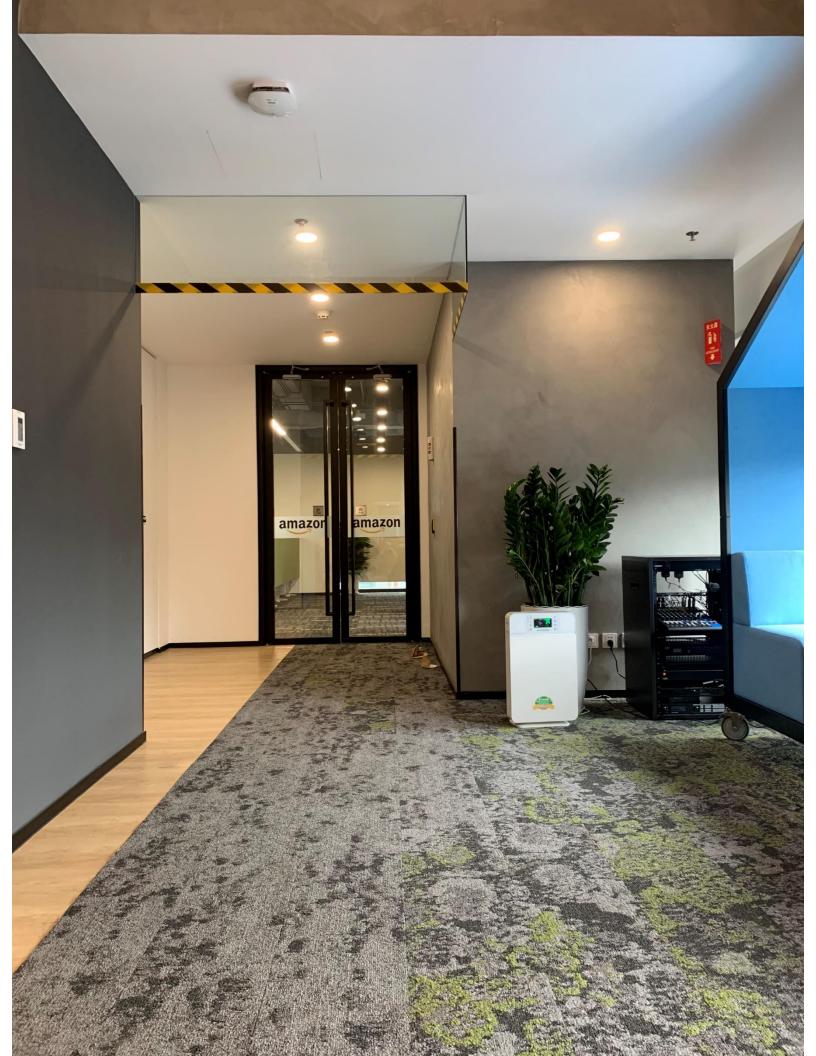



Lichen Collection





937 Frosted Shield



Goldspeck





Orange Sea



Everbloom



963 Firedot



975 Felt Finish



Dust Cloud

Iceland Moss

945

Silva

DESIGN

Tufted Pile Weight: 28 oz/yd2 (949 g/m2)

Product Type: Tile Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 9,509 Weight Density: 266,264

Stitches Per Inch: 9.5 (37.40 per 10 cm) Finished Pile Thickness .106" (2.69 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex NXT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

 $\label{eq:continuous} \textbf{System. Passes GSA requirements for permanent}$ stain resistant carpet.

Pattern Repeat: **Not Applicable**

12" x 36" (.3048 m x .9144 m)

Monolithic, Monolithic Stepping, Plank Half Lap, Installation Method: Basket Weave, Half Lap, Brick Ashlar, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171

Pre-Consumer Recycled Content:

NSF 140: EcoFlex NXT - NSF 140 Gold **Declared Red List Free** Declare Label:

PERFORMANCE

Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: ASTM E 662 Less than 450 Smoke Density:

SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: **Duracolor Stain Warranty, Lifetime Static**


^{*} China STOCK highlighted in red



GT402 Groundcover Tile 12BY36

Mohawk Group

Lichen Collection

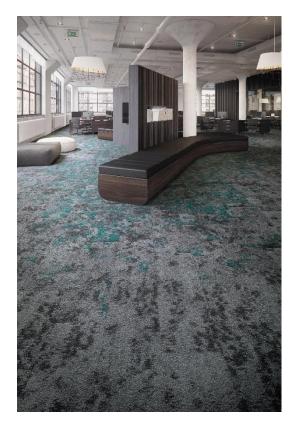

DESIGN

Tufted Pile Weight: 33 oz/yd2 (1119 g/m2)

Tile Product Type: Construction: Tufted

Minimum Sq. Yd.: No Minimum

Surface Texture: **Textured Patterned Loop** Gauge: 1/12 (47.00 rows per 10 cm)

Density: 11,423 Weight Density: 376,961

Stitches Per Inch: 9.5 (37.40 per 10 cm) Finished Pile Thickness: .104" (2.64 mm) Dye Method: **Solution Dyed** Backing Material: **EcoFlex NXT**

Fiber Type: **Duracolor® Tricor Premium Nylon**

Duracolor® by Mohawk Group's Stain Resistant Fiber Technology:

 $\label{eq:continuous} \textbf{System. Passes GSA requirements for permanent}$

stain resistant carpet. Pattern Repeat: **Not Applicable**

12" x 36" (.3048 m x .9144 m)

Monolithic, Monolithic Stepping, Plank Half Lap, Installation Method: Basket Weave, Half Lap, Brick Ashlar, Random,

Herringbone

GSA Stain Release Rating:

Stain Release Technology: Permanent, Built into Fiber Soil Release Technology: **EcoSentry Soil Protection**

Foot Traffic Recommendation TARR:

SUSTAINABILITY

IAQ Green Label Plus: CRI Green Label Plus GLP1171

Pre-Consumer Recycled Content:

NSF 140: EcoFlex NXT - NSF 140 Gold **Declared Red List Free** Declare Label:

PERFORMANCE


Static: AATCC-134 Under 3.5 KV ASTM E 648 Class 1(Glue Down) Flammability: Smoke Density: ASTM E 662 Less than 450


SERVICE

Lifetime Limited Carpet Tile Warranty, Lifetime Warranties: **Duracolor Stain Warranty, Lifetime Static**

Rock Face

^{*} China STOCK highlighted in red

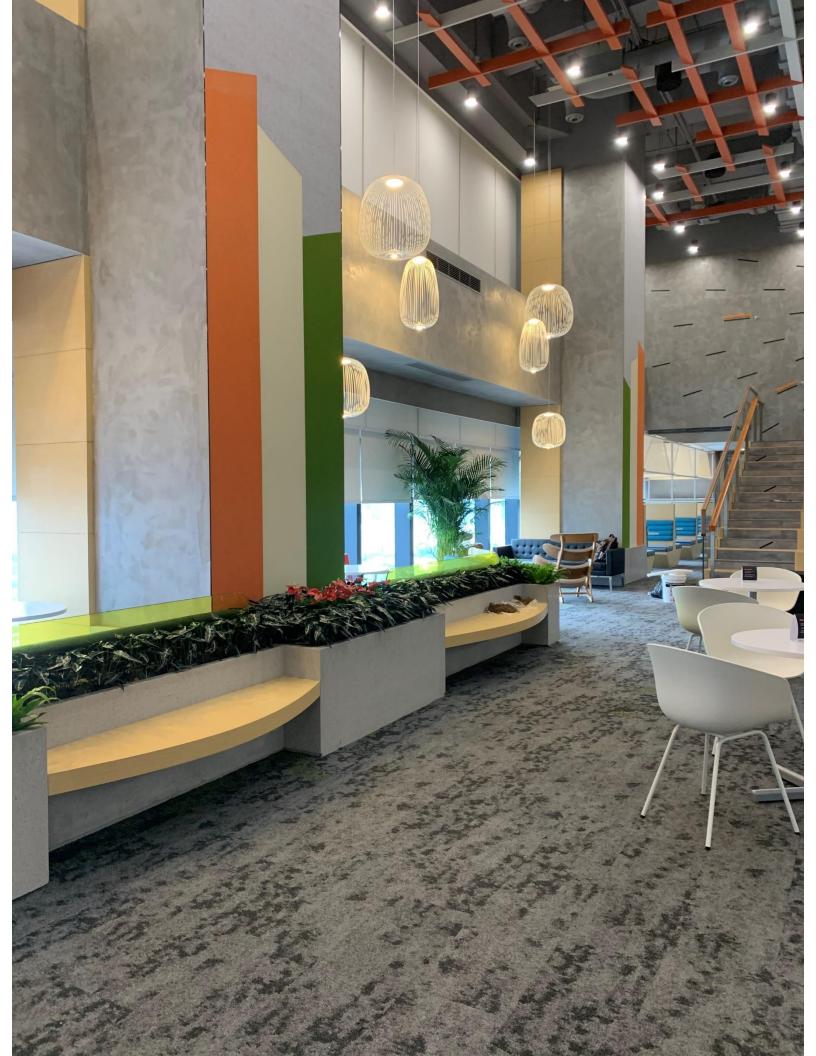

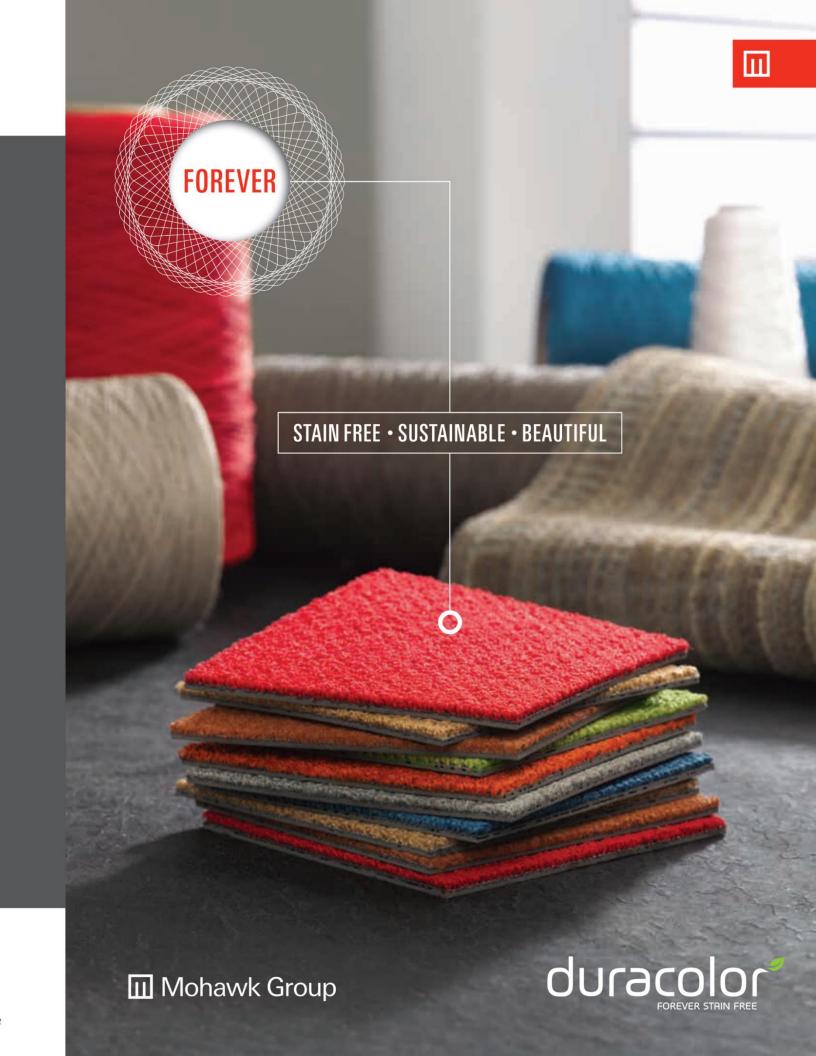

STAIN RESISTANCE THE SCIENCE



Common Nylon

The most common stains are caused by acid-based substances that carry a negative charge. Since most fibers are positively charged, the negatively charged acid-based substances are attracted to the opposite charge of the fibers and bond, creating a stain.




Duracolor Tricor

Duracolor Tricor fiber utilizes negatively charged polymers. The negative charge of the polymer ensures that the fiber, through its inherent characteristics, will repel negatively charged substances. The fiber never allows the common stain makers to bond, so the carpet resists the stain.

TRUSTED PERFORMANCE

Duracolor fiber has set the standard of high-performance commercial carpet since 1992. With enhanced soil hiding and removal capabilities, Duracolor Tricor builds upon a fiber already trusted to perform in demanding environments. When compared head to head to competitive nylon products, Duracolor Tricor delivers trusted performance.

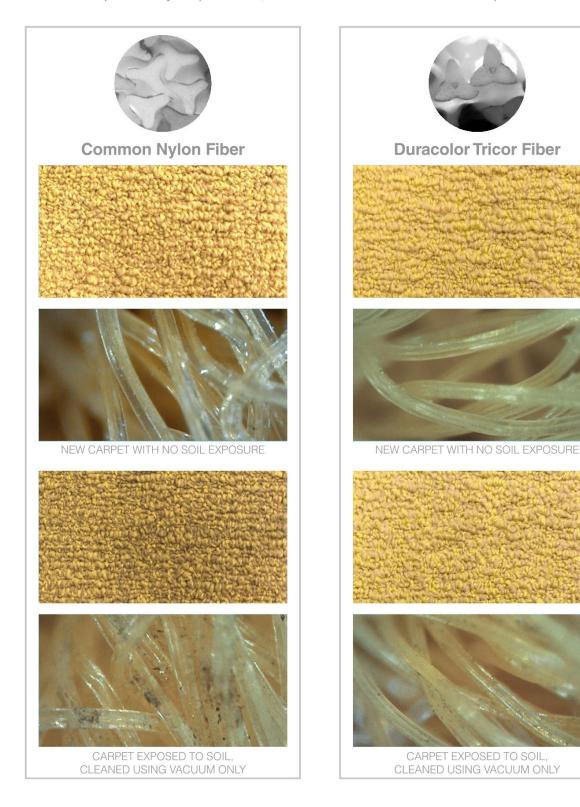



LIFETIME WARRANTY

Carpet Tile Warranty

Limited Commercial Lifetime Warranty – EcoFlex® ICT and EcoFlex® NXT

This limited warranty applies only to the original purchaser of Mohawk Group* carpet tiles for indoor commercial installations. This warranty applies only to EcoFlex® ICT and EcoFlex® NXT products.

The use of Mohawk Group branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk Group. Failure to use Mohawk Group branded adhesives will result in warranties being null and void. Substrates must be prepared using Mohawk Group's recommended floor preparation procedures.

Provided the designated carpet has been properly installed and maintained in the specified commercial location in strict accordance with Mohawk Group's instructions and procedures and subject to the limitations set forth herein, including the specifications and manufacturing tolerances established for the product, Mohawk Group warrants to the original Owner, the following:

I. Items Under Warranty

Mohawk Group warrants the following for the normal useful life of the carpet**:

- 1. Wear Carpet tiles will not wear more than 10% of their surface pile weight from abrasive wear. "Abrasive wear" means fiber loss from the carpet tiles through normal abrasion, not crushing or flattening of the carpet pile in any area, nor staining, soiling, fading, or change in carpet appearance, nor fiber loss due to abnormal usage of the carpet tiles;
- Static Carpet tiles will not give static discharges in excess of 3.5 KV when tested under AATCC Test Method 134 (Step);
- Edge Ravel/Zippering Carpet tiles will not edge ravel or zipper;

- 4. **Delamination** Carpet tiles will not delaminate (Chair pads are recommended for maximum appearance retention and to deter delamination); and
- Dimensional Stability Carpet tiles will not lose their dimensional stability per the AACHEN test ISO 2551.

II. Limitations – This warranty does not include:

- Disfigurement or damage caused by abnormal use or any damage to the carpet not arising out of a manufacturing defect in the carpet, including such disfigurement or damage as tears, burns, pulls, cuts, floods, excessive alkalinity, excessive moisture, installation on stairs, damage resulting from improper cleaning agents or methods, neglect, or damage in transit;
- Edge ravel where carpet is cut for access to floor outlets and around trench header ducts;
- Abuse by any athletic equipment such as roller skates, ski boots, or golf shoes;
- 4. Differential fading from light exposure, shading, pile crush, dye lot differences, or soiling;
- 5. Any condition that would have been visible upon inspection prior to the installation;
- Any condition resulting from other than ordinary wear or from any use for which the product was not designed; and
- Any issues related to moisture and alkalinity in the substrate. Moisture and pH testing are not the responsibility of Mohawk Group.