


Technical Specification


Collection Name	Coast/Constant/Cove
Yarn	100% Nylon 6
Construction	Colourpoint
Dyed Method	Solution Dyed
Gauge	1/11 inch
Stitches Per Inch	11 per inch
Pile Height	4.0 mm+/-0.5 mm
Total Thickness	8.5 mm+/-0.5 mm
Pile Weight	24 oz/sy (816 gm/sm)
Total Weight	100 oz/sy (3500 gm/sm)
Secondary Backing	PVC FREE- ECOTEC® (80% post-consumer PET bottles)

Primary Backing	Non-woven
Tile Size	50 cm x 100 cm
Packing	16 pcs(8sm/box)
Colorfastness	Grade 5 = No Change (AATCC 16)
Flammability	Class I (ASTM E648)
Smoke Density	Passed (ASTM E662)
Static Propensity	≤3.5 kV (AATCC-134)
Sound Absorption	ASTM C423 NRC 0.25 or Higher
SGBC	Leader
Declare Label	Declare Certified
Warranty	10 Years
Wear Classification	Heavy

Installation Methods:



Ashlar




Herringbone

- * Specifications are based on average normal manufacturing tolerances, variations do not affect product performance. As with all quality carpets, slight variations in colors may occur from dye lot to dye lot.
- * Protective chair pads are recommended under office chairs with roller castors to preserve appearance retention and to avoid excessive wear.
- * As with all dyed products, colors are subject to dye lot variations.

ECOTEC®

Carpet Tile Backing

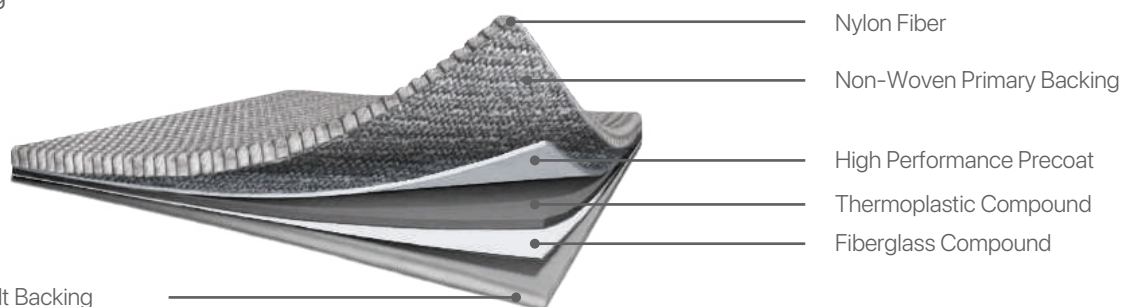

ECOTEC® Felt Backing
(recycled from PET drinking bottles)

ADVANTAGES :

- Eco friendly
- 100% recyclable
- Cushioning effect absorbs foot impact and enhances carpet durability
- Superior sound absorbency results in quieter environment
- Soft cushion effect enhances walking comfort and reduces leg fatigue.
- Clean indoor air quality
- Superior dimensional stability
- PVC Free, bitumen free

