



ONEWOOD Decking system consists of solid homogeneous planks of reconstituted timber which enables resanding and refurbishing works after years of wear. It has minimal shrinkage and expansion when exposed to environmental change. Its fabrication processes allow better dimensional stability as compared to natural hardwood products.

ONEWOOD Decking paired with PVC clip fastening system conceal screws for a neater outlook.

#### Raised Decking / Outdoor Flooring System

When required, our decking system is compatible with high strength height-adjustable and slope correctable pedestals for raised decking or flooring conditions. It is also available in full Class 1 fire rated system including the pedestal supports.

#### **Standard Dimensions**

Thickness mm	Width mm	Length <i>mm</i>
22	148	2500 and / or 3000
24	148	
20	95	

For enquiry on customised decking systems, please contact us.

## **ONEWOOD Decking Properties**



Termite Resistant



Water Resistant



Fire Resistant\*

\* Refer to Pg 4 for available fire test standard compliance.

#### **Features**



## Suitable for High Traffic

ONEWOOD is a product with high density and hence resistant to areas with high traffic. Together with compatible decking finishes, the durability of ONEWOOD is enhanced and makes it suitable for outdoor commercial areas.




#### Reuse and Refurbish

ONEWOOD Decking's homogeneous property enables resanding to reveal a fresh layer of beautiful wood grains that can be recoated for maintenance or to achieve a new look to complement your new design.


For outdoor weathering properties, please refer to page 5 of catalogue.

# **Typical ONEWOOD Decking System**

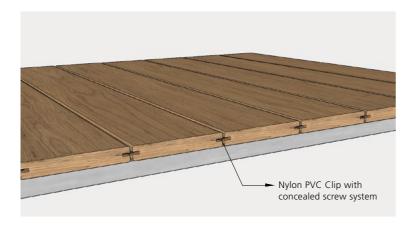



# **Typical ONEWOOD Decking Profile**



Section – Typical ONEWOOD Decking Profile

## **ONEWOOD Decking Finishes**

ONEWOOD Decking can be coated with the following exterior finishes. These finishes add resistance against wear and outdoor weathering on top of ONEWOOD's high durability and water resistant property.

