


 Mohawk Group

2025 CATALOG


APAC Collection



Goodrich Global
SINCE 1983

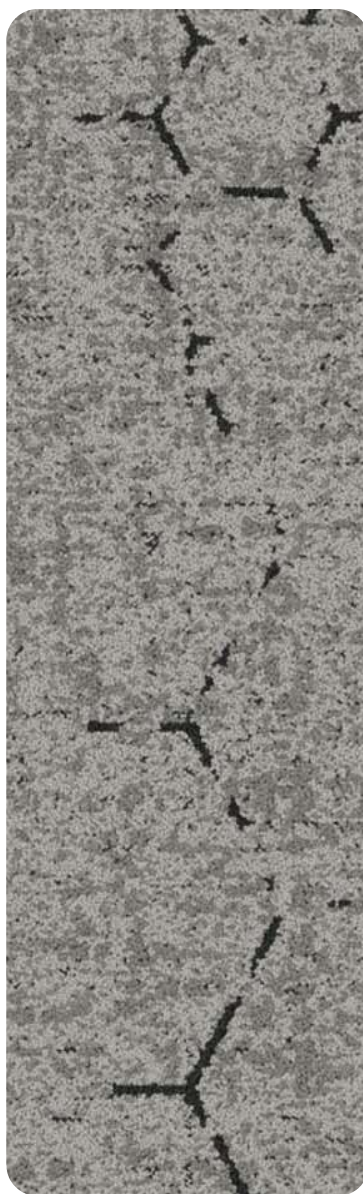

BELIEVE IN BETTER™

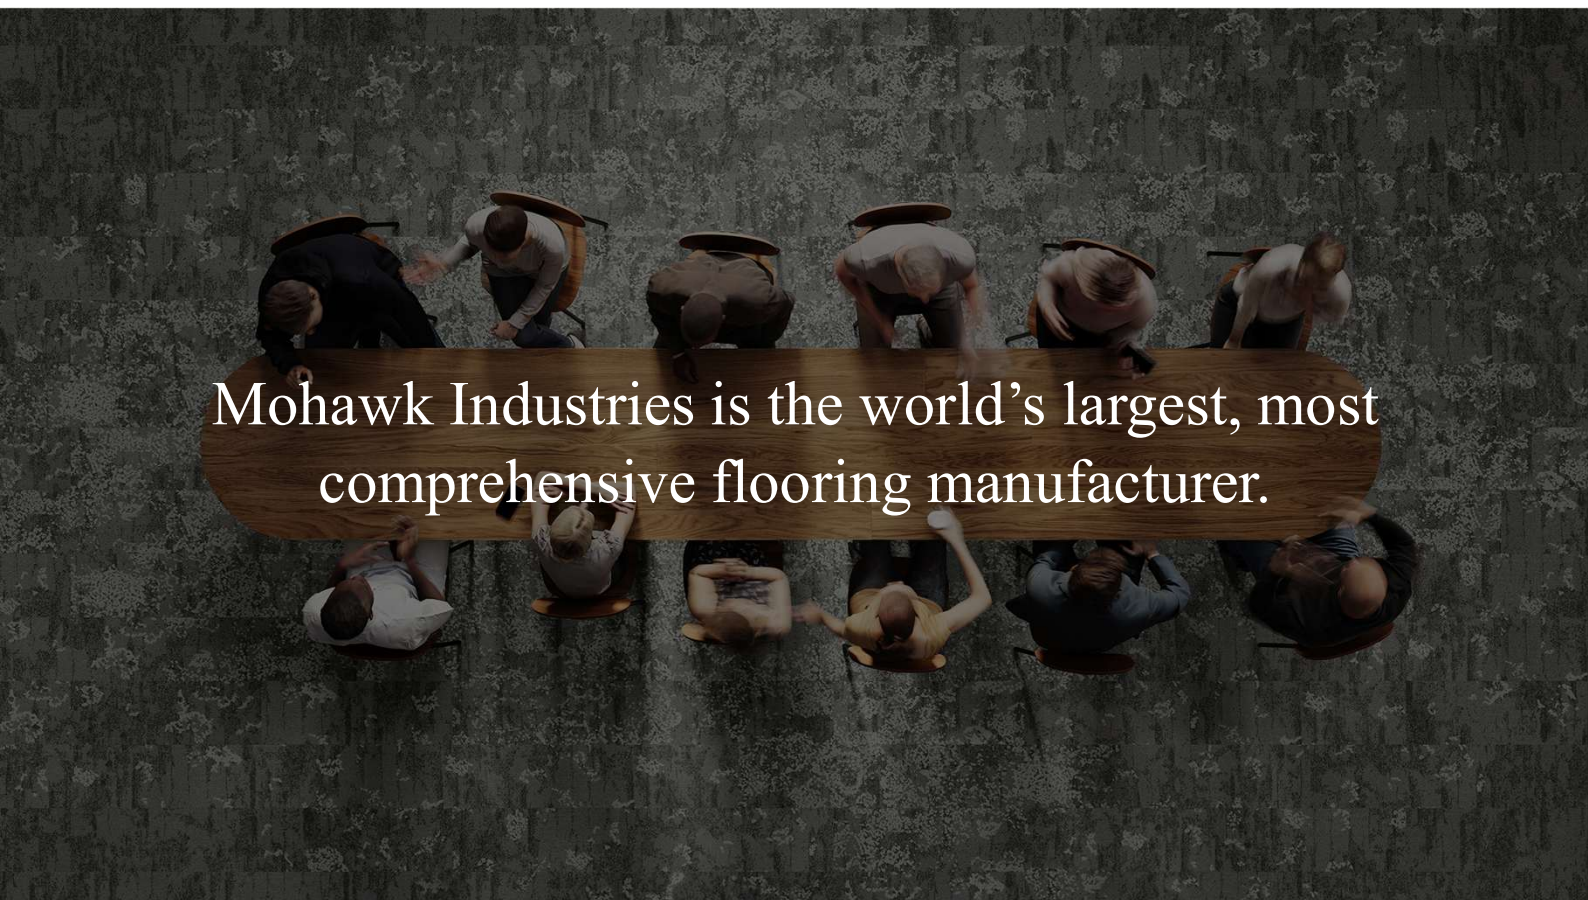

Mohawk Industries is the world's largest, most comprehensive flooring manufacturer.



\$11.2 B

In Global
Sales



43,000 +

Associates
Worldwide



170 +

Countries With
Sales & Operations

Ceramic Tile | Residential Carpet | Commercial Carpet | Area Rugs, Bath Rugs & Mats |
Laminate Flooring | Luxury Vinyl Tile | Sheet Vinyl | Wood Flooring | Countertops



19

Countries With
Manufacturing Facilities



25,000 +

Products With
Recycled Content



25,000 +

Customers
Worldwide

Mohawk Family of Brands


MOHAWK®


MOHAWK®
HOME

MARAZZI 

Karastan®

 Mohawk Group

 **ivc** COMMERCIAL

 daltile®

 AMERICAN OLEAN®

Godfrey Hirst

 moduleo®
Design Floors

 **ivc** home
RESIDENTIAL FLOORS

 leoline®
Residential Floors

KAI
GROUP

 RAGNO 

KERAMA MARAZZI


QUICK-STEP®
FLOOR DESIGNERS

eliane

 EMILGROUP

 DURKAN

PERGO®



FOREVER

STAIN FREE • SUSTAINABLE • BEAUTIFUL

 Mohawk Group

duracolor
FOREVER STAIN FREE

STAIN RESISTANCE THE SCIENCE



Common Nylon

The most common stains are caused by acid-based substances that carry a negative charge. Since most fibers are positively charged, the negatively charged acid-based substances are attracted to the opposite charge of the fibers and bond, creating a stain.



Duracolor Tricor

Duracolor Tricor fiber utilizes negatively charged polymers. The negative charge of the polymer ensures that the fiber, through its inherent characteristics, will repel negatively charged substances. The fiber never allows the common stain makers to bond, so the carpet resists the stain.

TRUSTED PERFORMANCE

Duracolor fiber has set the standard of high-performance commercial carpet since 1992.


With enhanced soil hiding and removal capabilities, Duracolor Tricor builds upon a fiber already trusted to perform in demanding environments. When compared head to head to competitive nylon products, Duracolor Tricor delivers trusted performance.



Common Nylon Fiber



NEW CARPET WITH NO SOIL EXPOSURE

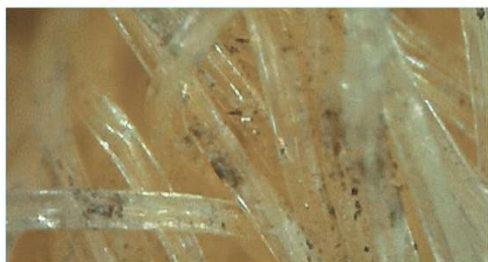


CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY




Duracolor Tricor Fiber



NEW CARPET WITH NO SOIL EXPOSURE

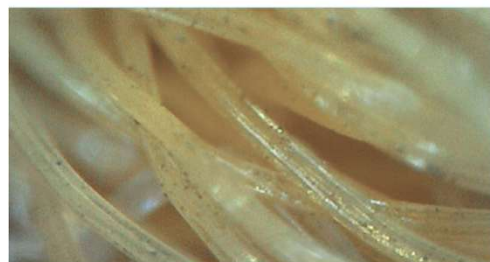

CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY

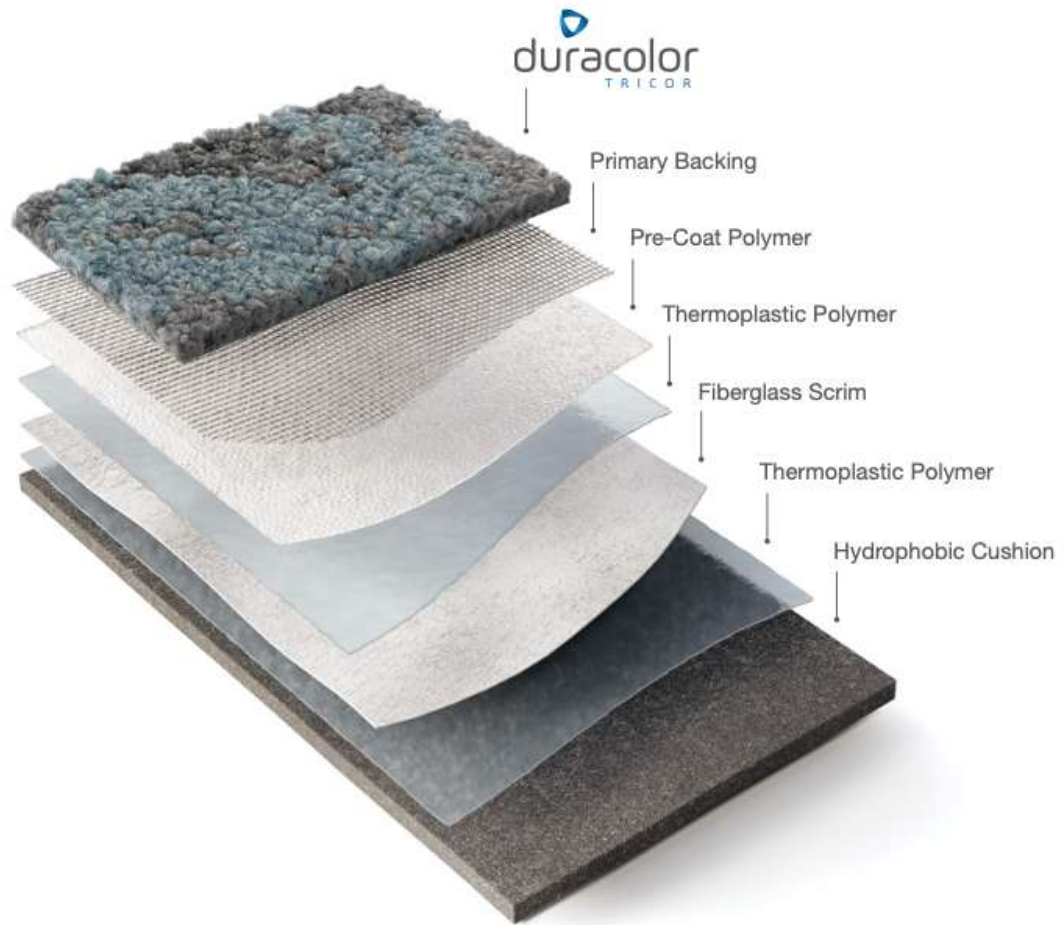

EcoFlex® ONE

ALL-IN-ONE FLOORING SOLUTION

Every element in the EcoFlex® ONE construction has purpose, and combined they form the industry's leading modular carpet solution. The hydrophobic PET cushion, backing layers, and Duracolor® Tricolor fiber are engineered with your end-goals in mind: to optimize your investment, be sustainably made, and provide a better occupant experience.

KEY FEATURES

- Better Acoustics
- Enhanced Comfort & Safety
- Worry-Free Installation
- Simplified Maintenance
- NSF 140 Platinum
- Carbon Neutral +5%
- Limited Lifetime Warranty

EcoFlex® ONE is a unified solution to the wide range of needs in your spaces. This advanced backing system improves every aspect of comfort and acoustics while eliminating moisture testing—all with a lighter environmental footprint that is carbon neutral plus an additional 5% offset. Tested and proven, EcoFlex® ONE is the holistic solution for human-centric environments.

EcoFlex® AIR CARPET TILE BACKING WITH ATTACHED CUSHION

The next evolution in cushion backed carpet tile, EcoFlex® AIR offers substantial moisture management, sound reduction and enhanced comfort under foot. It also incorporates an average of 50% recycled content (pre- and post-consumer) by total product weight. Additionally, in most cases no moisture testing is required prior to installation.**

PERFORMANCE


- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Allows subfloor moisture vapor to flow through the backing and escape from the seams**
- Provides permanent tile dimensional stability
- Noise Reduction Coefficient = 0.25; carpet tiles absorb 25% of ambient sound
- Impact Insulation Class—up to 73
- Performs up to 2x better reducing sound transmission than hard surfaces
- Construction features superior tuft bind that is highly resistant to edge ravel
- Reduces the risk of severe injury in the event of a slip or fall

SUSTAINABILITY

- Total 58% recycled content by finished product weight: 45% pre-consumer and 13% post-consumer recycled content
- PET Cushion layer of EcoFlex™ AIR contains a minimum of 90% post-consumer recycled content.
- Certified NSF/ANSI 140 Platinum with a minimum of 13% post-consumer recycled content.
- EcoFlex™ AIR may contribute to LEED v4, Living Building Challenge, and the WELL Building Standard
- Contains no plasticizers
- Red List Free

SERVICE

- Available as an option on all Mohawk Group carpet tiles, minimum square meter quantities may be required.
- Contact your sales representative for more information.

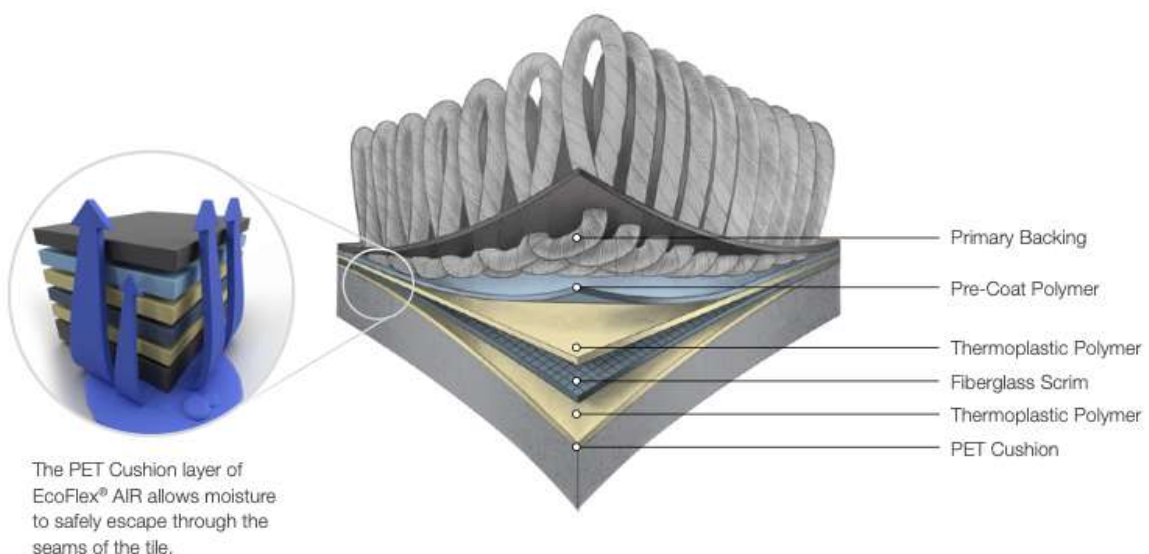


* Recycled content claim third party verified by UL (Underwriters Laboratory)


** Please consult Mohawk Group Installation Instructions for more details

COLLECTION OVERVIEW

RELAXING FLOORS

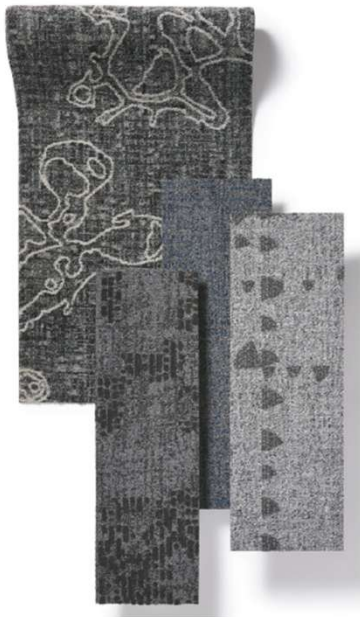


This collection is the culmination of art, science and human-centered design based on fractal patterns. Relaxing Floors utilizes fractals to tap into our innate affinity for nature and activate our bodies' stress-relieving response to similar patterns.

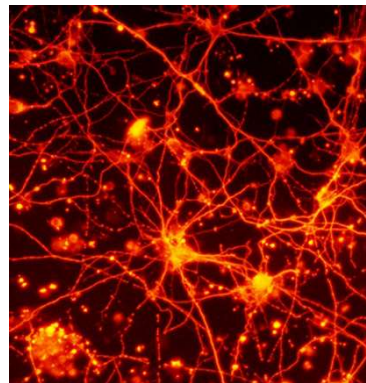




Pathmakers

By looking deeply into the world around us, we discover nature's systems of care—how each part of an ecosystem is connected and helps to sustain the whole. Even the tiny bee is integral, its daily paths of pollination generating new plants, in turn helping to sustain all life. With bees as inspiration, we created the Pathmakers carpet plank collection.

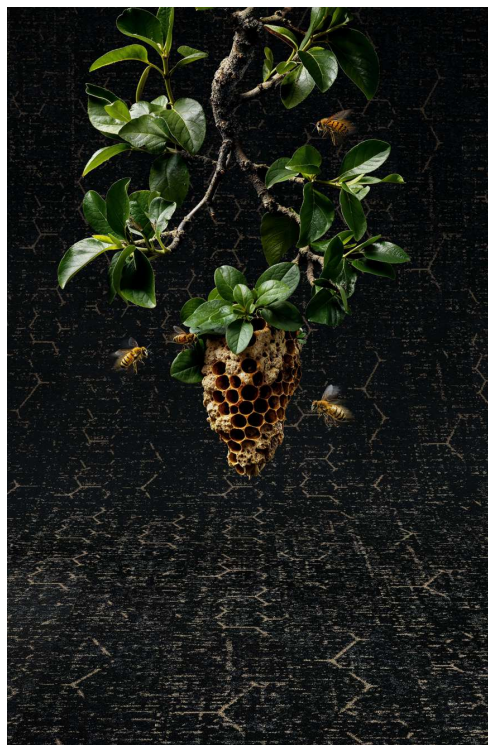

Smart City

Mohawk Group believes design is a journey, and our next stop is Smart City—a Living Product Certified carpet plank system inspired by some of the world's most connected places. Urban Model offers an intricate base texture presented in three distinctive hues and contrast levels, while Urban Mobility layers a metropolitan subway line pattern in six sophisticated color options.



New York



London



Shanghai



Berlin



Paris



Istanbul



Lichen Community

The multi-hued, multi-textured lichens that thrive on bark and rock formations once again inspire us in Lichen Community collection. The refined Micro Bloom and Macro Bloom palette includes warm and cool background textures with more neutral and tonal accent colors, which can help to define communal spaces and create unique large-scale installations.





DESIGN

Tufted Pile Weight:	15oz/yd2 (508 g/m2)
Product Type:	Tile
Construction:	Tufted
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	2.71 mm
Total Thickness:	6.71 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (0.609 m x 0.609 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology: Soil Release	Sentry Plus Stain Protection
Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



878
Dark Taupe



959
Medium Grey



989
Dark Grey





Moon Surface Collection

MG22006 Blend



DESIGN

Tufted Pile Weight:	15oz/yd2 (508 g/m2)
Product Type:	Tile
Construction:	Tufted
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	2.71 mm
Total Thickness:	6.71 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (0.609 m x 0.609 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology: Soil Release	Sentry Plus Stain Protection
Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



878
Dark Taupe




959
Medium Grey



989
Dark Grey



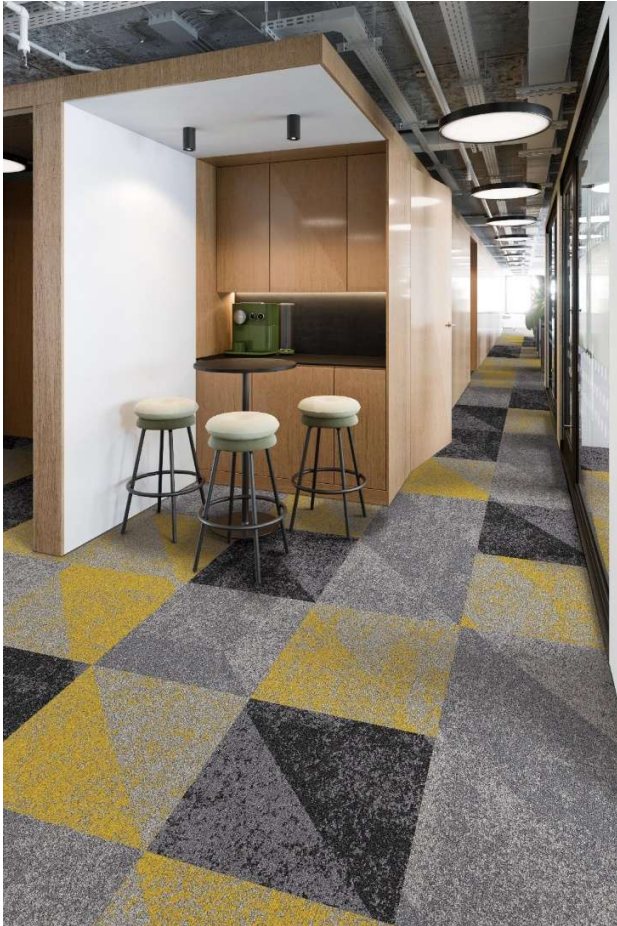

DESIGN

Tufted Pile Weight:	15oz/yd2 (508 g/m2)
Product Type:	Tile
Construction:	Tufted
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	2.71 mm
Total Thickness:	6.71 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (0.609 m x 0.609 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology: Soil Release	Sentry Plus Stain Protection
Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



878 Dark Taupe



959 Medium Grey



989 Dark Grey




911 M. Sunlight




912 M. Page Pink



913 M. Solar



924 M. Copper Flame



923 M. Azalea




931 D. Sunlight




932 D. Page Pink



933 D. Solar



944 D. Copper Flame



923 D. Azalea




916 M. Jungle



915 M. Filtered



918 M. Aquarius



921 M. Waterfall




936 D. Jungle



935 D. Filtered



938 D. Aquarius



941 D. Waterfall



Join 959 | Join 918



Ground Breaking Collection

MG22008 Ground Breaking



DESIGN

Tufted Pile Weight:	15oz/yd2 (508 g/m2)
Product Type:	Tile
Construction:	Tufted
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	2.52 mm
Total Thickness:	6.52mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (0.609 m x 0.609 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology: Soil Release	Sentry Plus Stain Protection
Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




535
Cornflower




839
Flaz



859
Taupe



929
Silver



949
Mineral



989
Charcoal





DESIGN

Tufted Pile Weight:	15oz/yd2 (508 g/m2)
Product Type:	Tile
Construction:	Tufted
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	6,752
Weight Density:	106,146
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Finished Pile Thickness:	2.91 mm
Total Thickness:	6.91 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (0.609 m x 0.609 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




556A
Filtered




556B
Filtered




556C
Filtered




956A
Tangent Teal




956B
Tangent Teal



956C
Tangent Teal




656A
Jungle




656B
Jungle



656C
Jungle




943A
Fractal Fire



943B
Fractal Fire



943C
Fractal Fire




751A
Oatmeal




751B
Oatmeal



751C
Oatmeal




945A
Infinity Indigo




945B
Infinity Indigo




945C
Infinity Indigo




955A
Grey Metal



955B
Grey Metal



955C
Grey Metal

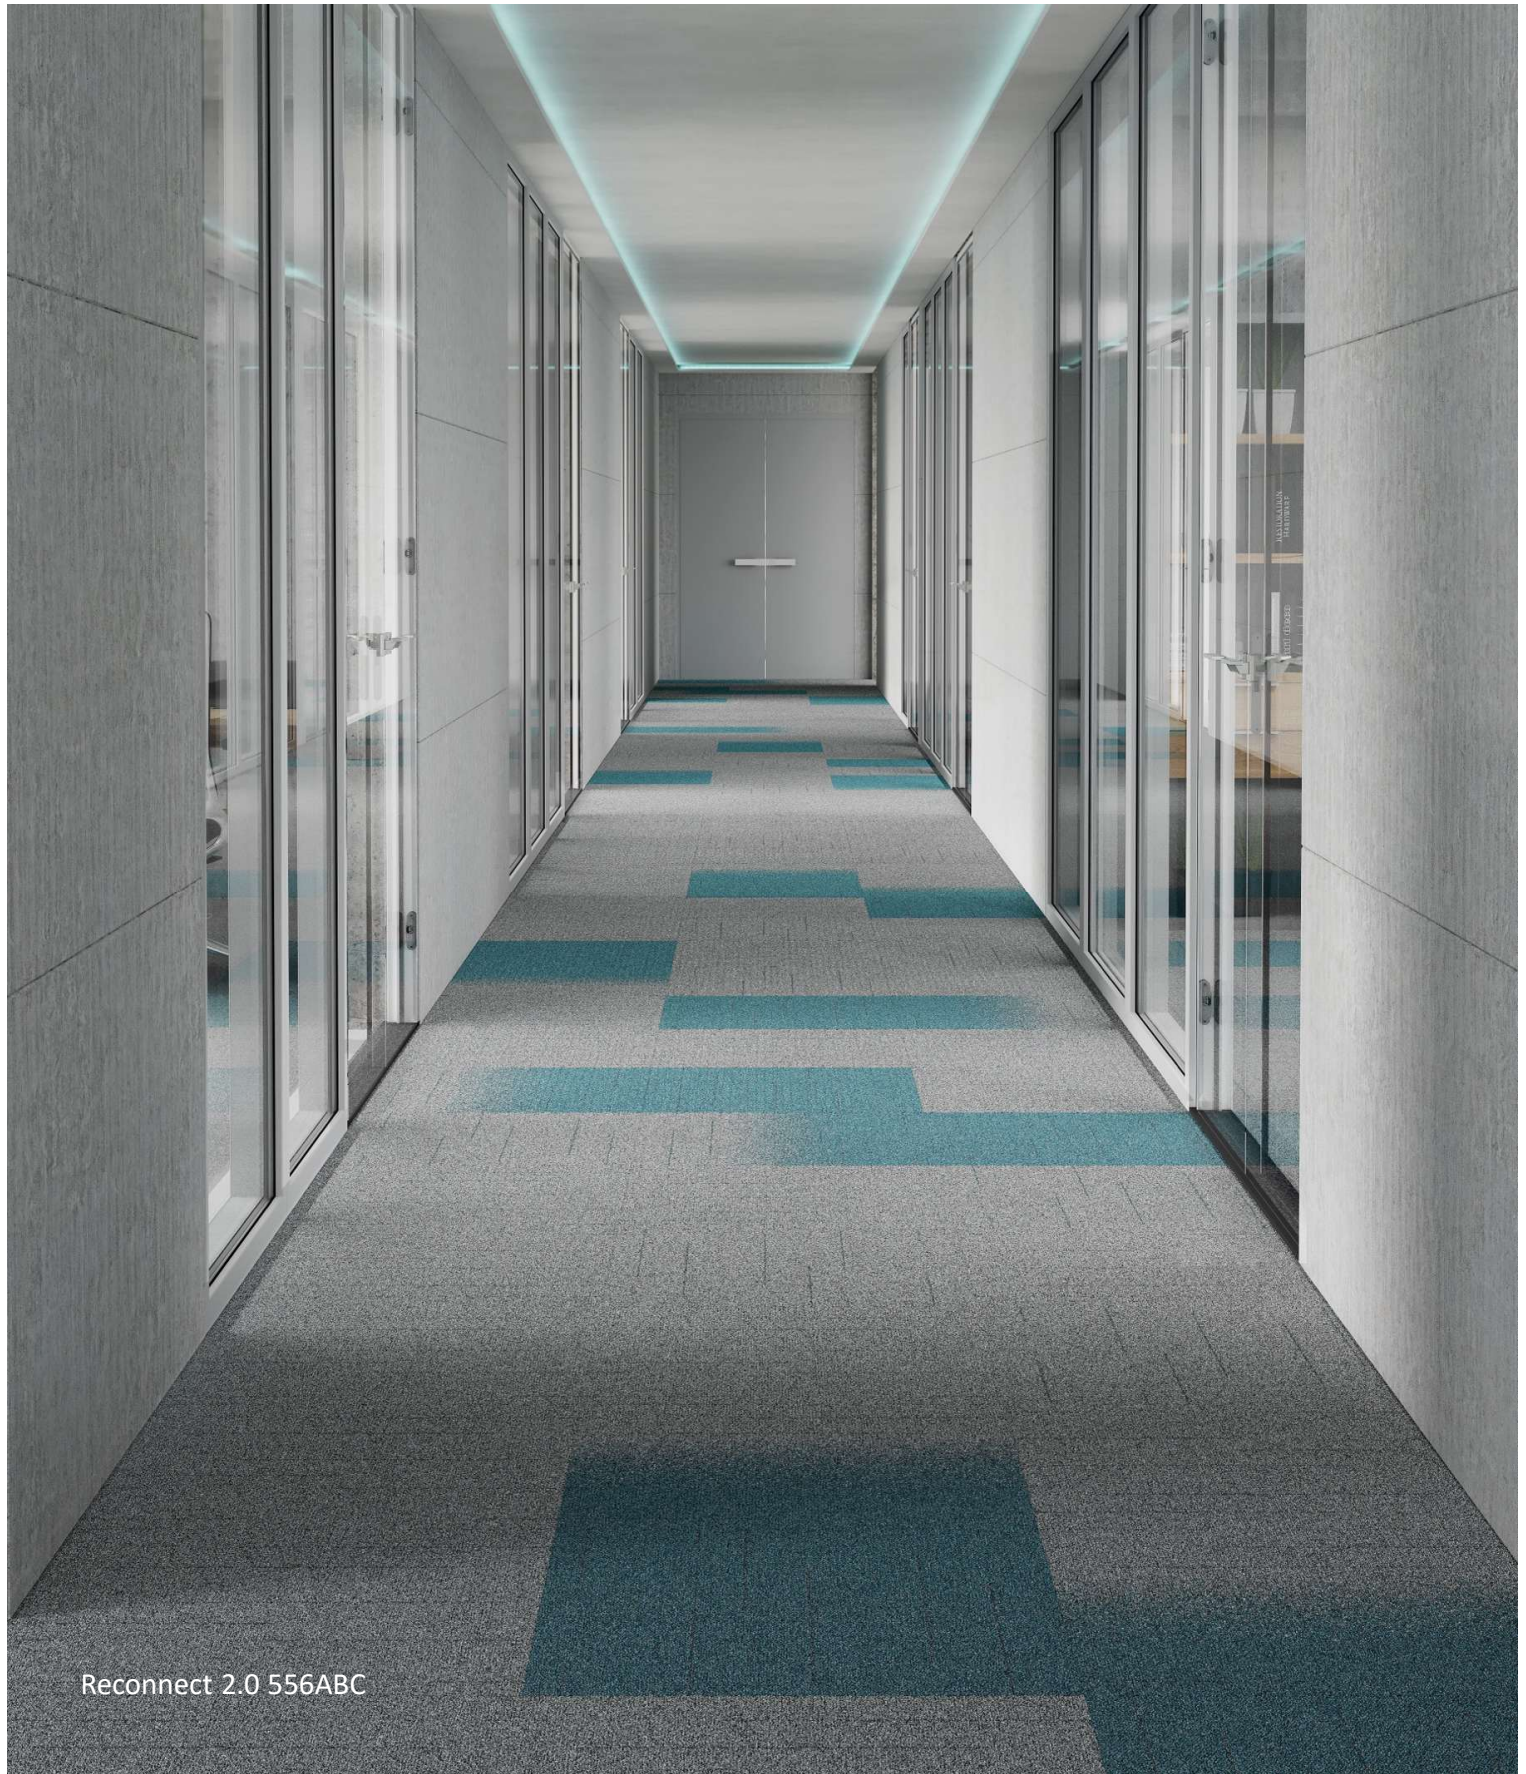

Sketch Effect Collection



DESIGN


Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,585
Weight Density:	98,780
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Total Thickness:	6.5 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Monolithic, Vertical Ashlar, Brick Ashlar, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy




593
Navy Gray



929
Light Elm




937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Sketch Effect Collection



DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,000
Weight Density:	90,000
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Total Thickness:	6.5 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




593
Navy Gray




929
Light Elm




937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal



Visual Edge Collection



DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	5,192
Weight Density:	77,884
Stitches Per Inch:	11.0 (43.31 per 10 cm)
Finished Pile Thickness:	6.5 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Half Lap, Plank Half Lap, Herringbone
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


593
Indigo Ink

929
Warm Neutral

937
Wet Cement

948
Rustic Taupe

979
Metal Grey

989
Dark Charcoal





DESIGN

Tufted Pile Weight:	15 oz/yd2 (509 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	5,869
Weight Density:	88,043
Stitches Per Inch:	11.2 (44.09 per 10 cm)
Total Thickness:	6.5 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone
Stain Release Technology:	EcoSentry Plus Stain Protection
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



593
Indigo Ink



929
Warm Neutral



937
Wet Cement



948
Rustic Taupe



979
Metal Grey



989
Dark Charcoal





DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,100
Weight Density:	105,077
Stitches Per Inch:	10.4 (40.94 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Brick Ashlar, Side Match
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




593
Wellspring




626
Meadow



868
Yarrow



924
Moraine



957
Freshwater



958
Seedbed



959
Peppercorn



989
Rooted



Base Layer 593



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,100
Weight Density:	105,077
Stitches Per Inch:	10.4 (40.94 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Brick Ashlar, Side Match
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy




593
Wellspring



626
Meadow



868
Yarrow



924
Moraine



957
Freshwater



958
Seedbed



959
Peppercorn



989
Rooted

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------





DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,100
Weight Density:	105,077
Stitches Per Inch:	11.4 (44.88 per 10 cm)
Total Thickness:	6.8 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Brick Ashlar, Multi-Directional, Quarter Turn
	Side Match, Vertical Ashlar
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



933
Pi Pink



936
Parabola Peridot



943
Fractal Fire



944
Polygon



945
Infinity Indigo



946
Integral Ivy



955
Aqua Apex



956
Tangent Teal



971
Golden Ratio



972
Calculations



973
Sunset Sequences



975
Ice Inverse



977
Iron Index



987
Discrete Diamond



988
Tessellation Taupe



989
Ink Integer



Corresponding Angle 936



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,100
Weight Density:	105,077
Stitches Per Inch:	11.5 (45.28 per 10 cm)
Total Thickness:	6.8 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter TurnSide, Match Vertical
	Ashlar Brick, Ashlar Multi-Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY


Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE


Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



933
Pi Pink



936
Parabola Peridot



943
Fractal Fire



944
Polygon




945
Infinity Indigo



946
Integral Ivy



955
Aqua Apex



956
Tangent Teal



971
Golden Ratio



972
Calculations



973
Sunset Sequences



975
Ice Inverse



977
Iron Index




987
Discrete Diamond



988
Tessellation Taupe



989
Ink Integer

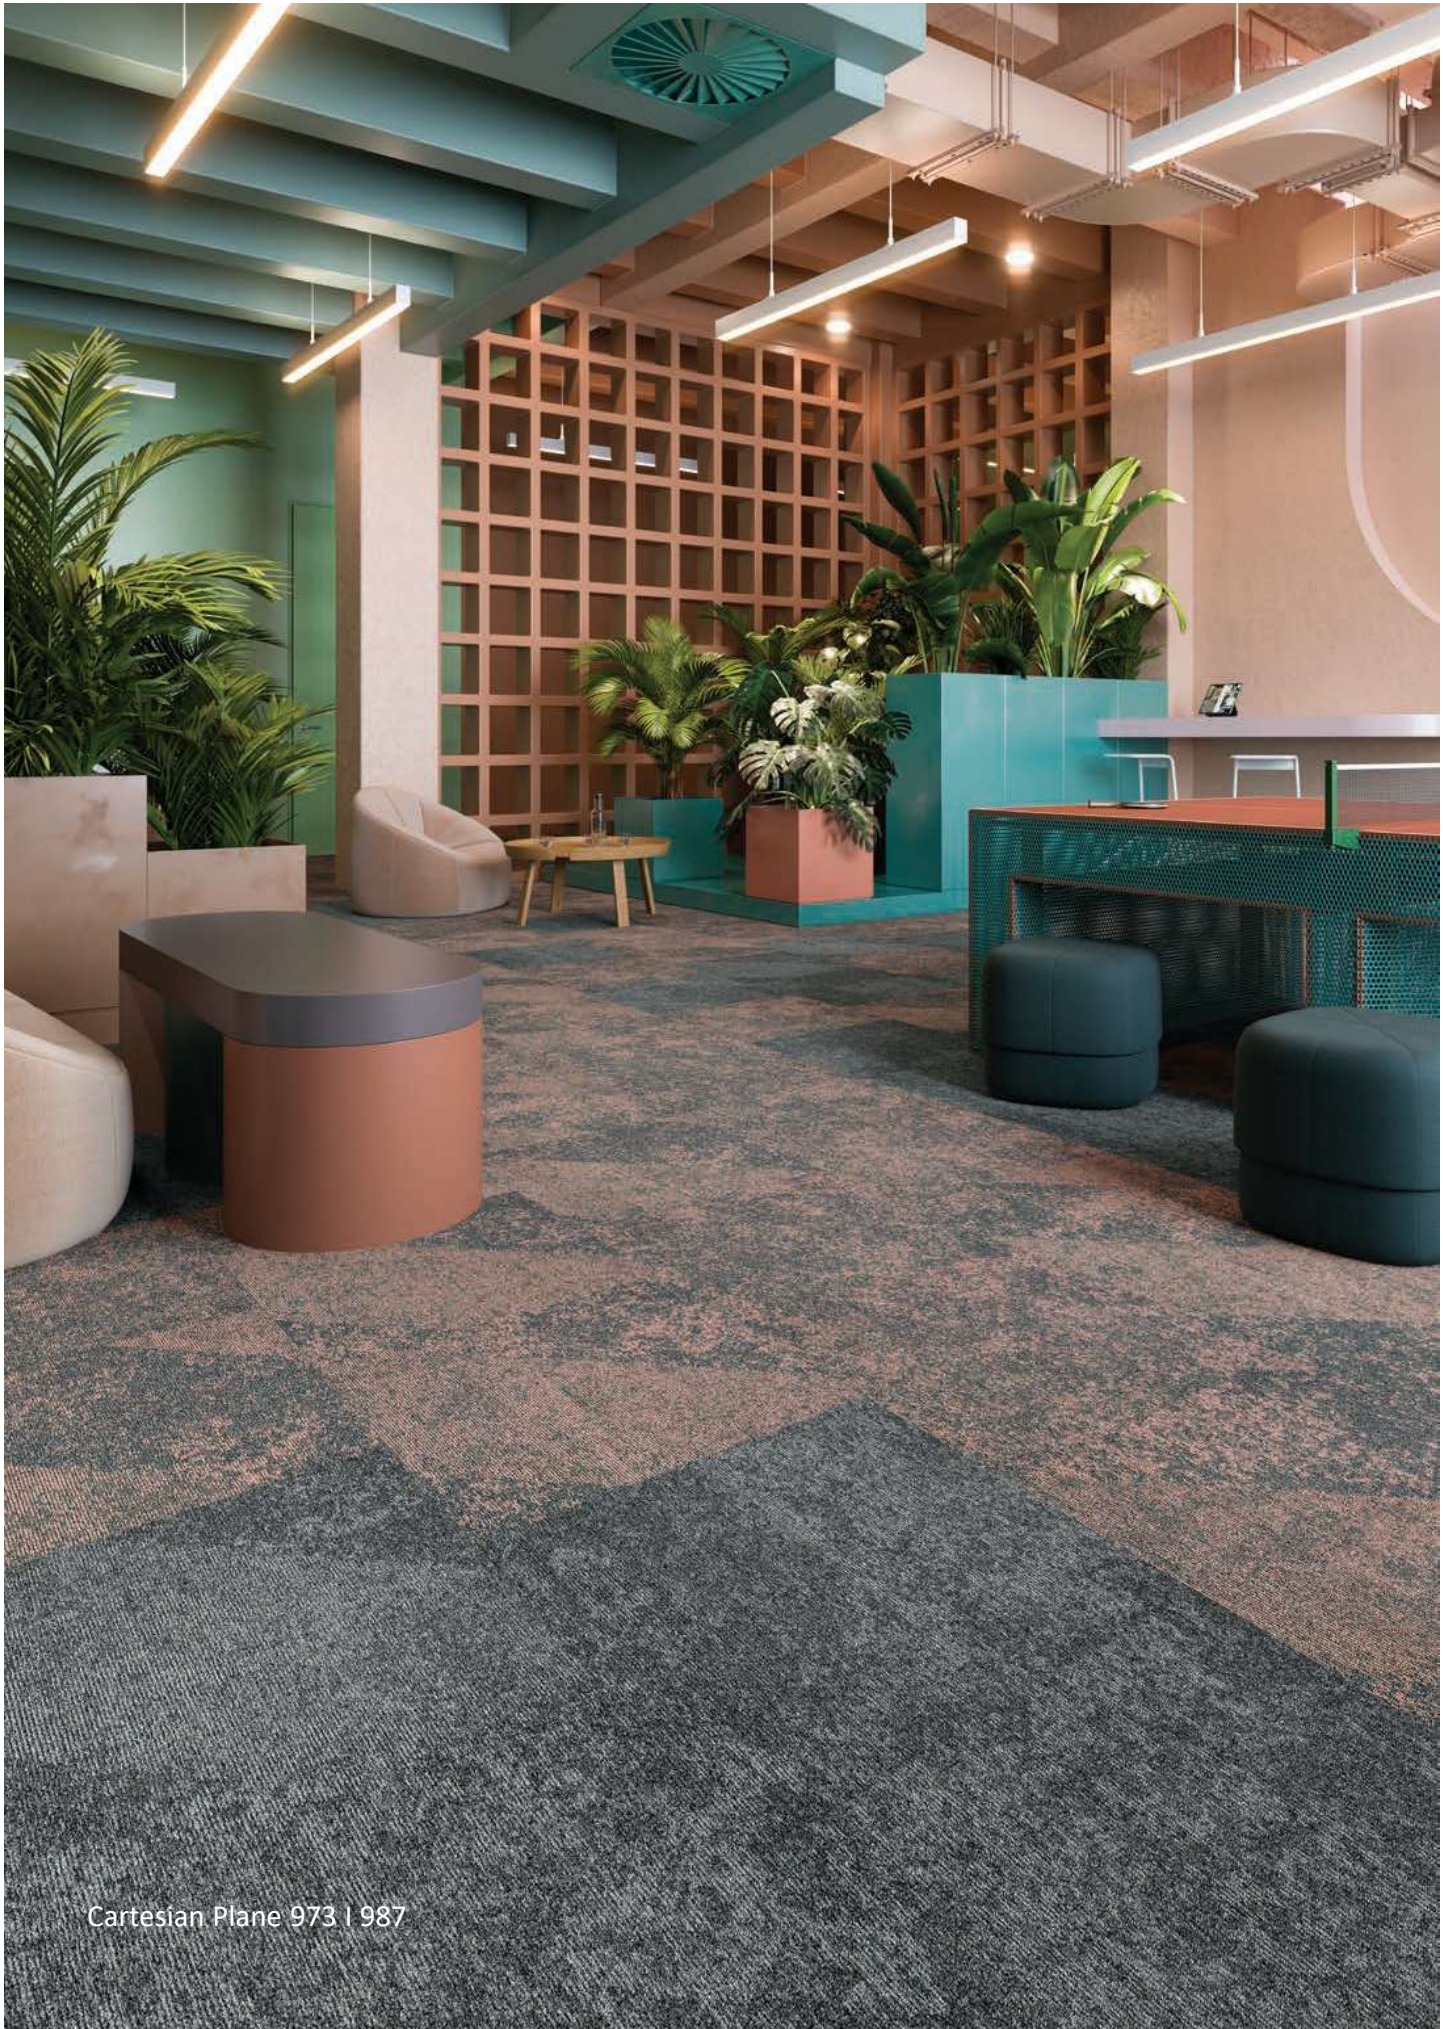

Cartesian Plane 973 | 987

Creative Spark Collection



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/10 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (39.37 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




131
Sunny Disposition



252
Nurturing Nectarine



332
Pondering Petal



354
Reflective Raspberry



363
Cheerful Cherry



484
Uplifting Ultraviole



545
Dynamic Dewdro



546
Loving Lagoon



547
Spirited Sky



565
Serendipity Sapphire



569
Sentimental Steel



575
Moody Blue



589
Independent Indigo



646
Enchanting Eucalyptu



651
Graceful Green



656
Playful Pine



675
Tranquil Teal



686
Friendly Fern



854
Subtle Sepia




858
Dreamy Driftwood



862
Blissful Broze



888
Unruly Umber



889
Patient Pepper




917
Whimsical Whisper



928A
Mushroom



935
Zesty Zinc




939
Goofy Gray



949
Silly Stone



954
Sublime Silver



969
Serendipitous Slate



989
Carbon



999
Mesmerizing Midnight



* China available color highlighted in red






DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,181
Weight Density:	105,077
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Vertical Ashlar, Quarter Turn, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy


 569
Cadet

 853
Fallow

 924
Platinum

 958
Ecu

 959
Slate

 989
Charcoal

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




Adaptable 989



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,725
Weight Density:	114,625
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy




569
Cadet




853
Fallow




924
Platinum



958
Ecrú



959
Slate



989
Charcoal

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




Academic View 924



DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	6,580
Weight Density:	111,860
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	24" x 24" (.6096 m x .6096 m)
Installation Method:	Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy


 569
Cadet

 853
Fallow

 924
Platinum

 958
Ecu

 959
Slate

 989
Charcoal

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	8,383
Weight Density:	142,520
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


 569
Cadet

 853
Fallow

 924
Platinum

 958
Ecu

 959
Slate

 989
Charcoal



Shared Path 924 1-9890


DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	7,285
Weight Dcensity:	123,857
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


 911
Mellow Yellow

 913
Orange Crush

 914
Purple Dawn

 915
Blue Dusk

 916
Lime Rush

 919
Pink Berry

 931
Neon Citron

 933
Crimson Flash

 944
Cotton Candy

 946
Above Par

 954
Purple Ash

 955
Cosmic Sky



Shared Path 924 | Disruptive Path 913


DESIGN

Tufted Pile Weight:	17 oz/yd2 (576 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	7,846
Weight Density:	133,384
Stitches Per Inch:	12.0 (47.24 per 10 cm)
Total Thickness:	6.9 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex Air
Fiber Type:	Colorstrand® SD Nylon
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Stain Release Technology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Protection
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

Material Health:	Declare
NSF 140:	EcoFlex Air-NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


 559
Cadet Blaze

 859
Fallow Reflection

 929
Platinum Gleam

 939
Ecru Glimmer

 949
Slate Burst

 979
Charcoal Spark



Metallic Path 949

Optic Reset Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
TuftedPile Weight:	18 oz/yd2 (610 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	6.92 mm
StitchesPer Inch:	12.3 (48.43 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Treatment
Density:	5,062
Weight Density:	9,125
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



282
Fresco Light



585
Indigo Light



696
Verdigris Light



868
Nuance Light



957
Ferro Light



959
Moonlit Light



979
Silhouette Light



987
Cinematic Light



988
Undertone Light



Field of View Light 868

Optic Reset Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
TuftedPile Weight:	18 oz/yd2 (610 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	6.92 mm
StitchesPer Inch:	12.1 (47.64 per10 cm)
Dye Method:	SolutionDyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry SoilTreatment
Density:	5,400
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, BrickAshlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



282
Fresco Dark



585
Indigo Dark



696
Verdigris Dark



868
Nuance Dark



957
Ferro Dark



959
Moonlit Dark



979
Silhouette Dark



987
Cinematic Dark



988
Undertone Dark



Optic Reset Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
TuftedPile Weight:	18 oz/yd2 (610 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	6.92 mm
StitchesPer Inch:	12.4 (48.82 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	4,695
Weight Density:	84,521
Backing Material:	EcoFlex One
Installation Method:	Brick Ashlar, Random, Half Lap, Plank Half Lap, Basket Weave, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



282
Fresco



585
Indigo



696
Verdigris



868
Nuance



957
Ferro



959
Moonlit



979
Silhouette



987
Cinematic



988
Undertone



Shifted Focus 987

Fractal Fluency Collection



535
Cornflower




545
Royal



839
Flax



859
Taupe




929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	18 oz/yd ² (610 g/m ²)
Finished PileThickness:	3.17 mm
Total Thickness:	6.97 mm
StitchesPer Inch:	12.1 (47.64 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Treatment
Density:	5,445
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



LineD 949

Fractal Fluency Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	18 oz/yd ² (610 g/m ²)
Finished PileThickness:	3.17 mm
Total Thickness:	6.97 mm
StitchesPer Inch:	12.1 (47.64 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	5,184
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450





SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


535
Cornflower

545
Royal

839
Flax

859
Taupe

929
Silver

949
Mineral

969
Iron

989
Charcoal



SquareD 839

Fractal Findings Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	19 oz/yd2 (644 g/m2)
Finished PileThickness:	3.17 mm
Total Thickness:	6.97 mm
StitchesPer Inch:	12.1 (47.64 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Colorstrand® SD Nylon
Stain ReleaseTechnology:	Sentry Plus Stain Protection
Soil Release Technology:	Sentry Soil Treatment
Density:	5,516
Backing Material:	EcoFlex Air
Installation Method:	Brick Ashlar, Multi Directional, Quarter Turn, Vertical Ashlar
Size:	24" x 24" (609 cm x 609 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex Air -NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



822
Marmot




826
Portage




827
Snow Dome



829
Sable



853
Caribou



855
Windswept




856
Grand Pacific



857
Silverthrone



975
Raven



976
Serene



977
Beluga



Explored 855

Fractal Findings Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	19 oz/yd2 (644 g/m2)
Finished PileThickness:	3.17 mm
Total Thickness:	6.97 mm
StitchesPer Inch:	12.1 (47.64 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Colorstrand® SD Nylon
Stain ReleaseTechnology:	Sentry Plus Stain Protection
Soil ReleaseTechnology:	Sentry Soil Treatment
Density:	5,516
Backing Material:	EcoFlex Air
Installation Method:	Brick Ashlar, Multi Directional, Quarter Turn, Vertical Ashlar
Size:	24" x 24" (609 cm x 609 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex Air -NSF 140 Platinum
EPD:	EcoFlex Air EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



822
Marmot



826
Portage



827
Snow Dome



829
Sable




853
Caribou



855
Windswept



856
Grand Pacific




857
Silverthorne



975
Raven



976
Serene



977
Beluga



Discovered 977

Timeless Tailored Collection

535
Cornflower

545
Royal

839
Flax

859
Taupe

929
Silver

949
Mineral

969
Iron

989
Charcoal

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	18 oz/yd2 (610 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	7.1 mm
StitchesPer Inch:	13.5 (51.35 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	6,893
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Timeless Tailored Collection


535
Cornflower

545
Royal

839
Flax

859
Taupe

929
Silver

949
Mineral

969
Iron

989
Charcoal

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	19 oz/yd2 (644 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	7.1 mm
StitchesPer Inch:	13.9 (54.72 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	6,000
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Timeless Tailored Collection


535
Cornflower

545
Royal

839
Flax

859
Taupe

929
Silver

949
Mineral

969
Iron

989
Charcoal

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	19 oz/yd2 (644 g/m2)
Finished PileThickness:	3.12 mm
Total Thickness:	7.1 mm
StitchesPer Inch:	139 (54.72 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	6,000
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Distressed Twill 929 | 949

Wild Horizon Collection



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.24 rows per 10 cm)
TuftedPile Weight:	19 oz/yd2 (644 g/m2)
Finished PileThickness:	3.75 mm
Total Thickness:	7.3 mm
StitchesPer Inch:	13.5 (51.35 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Treatment
Density:	6,893
Weight Density:	97,200
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Random, Herringbone
Size:	12" x 36" (30.48 cm x 91.44 cm)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



726
White Trillium



727
Plumegrass



732
Trumpet Honeysuckle



739
Wiregrass



745
Dayflower



749
Gray Dogwood



863
Scarlet Creeper



867
Broomsedge



954
Wild Rye



955
Bluebonnet



971
Goldenrod



977
Black Willow



Wild Horizons 739 1 Cus. Yellow accent


141
Sunlight

252
Solar

373
Atomic

656
jungle

839
Bone

859
Roasted

937
Optic

949
Concrete

959
Bedrock

969
Titanium

979
Magnetic

989
Shadow

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	20 oz/yd ² (678 g/m ²)
Total Thickness:	7.3 mm
Stitches Per Inch:	10.8 (45.52 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	5,853
Weight Density:	117,073
Backing Material:	EcoFlex One
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
Size:	12" x 36" (.3048 m x .9144 m)
Pattern Repeat:	Not Applicable

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1 (Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Color Balance 937 | 959 | 979



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	TexturedPatternedLoop
Gauge:	1/12 (47.00 rows per 10 cm)
TuftedPile Weight:	22 oz/yd2 (746 g/m2)
Finished PileThickness:	2.93 mm
Total Thickness:	7.2 mm
StitchesPer Inch:	10.0 (39.37 per 10 cm)
Dye Method:	SolutionDyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	8,280
Weight Density:	192,472
Backing Material:	EcoFlex One
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone, Random
Size:	12" x 36" (.3048 m x .9144 m)
Pattern Repeat:	Not Applicable
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



565 Dewdrop Dark



729 Serene Light



739 Birdsong Light



745 Dewdrop Light



829 Wildwood Light




859 Oud Light




868 Wildwood Dark



938 Birdsong Dark

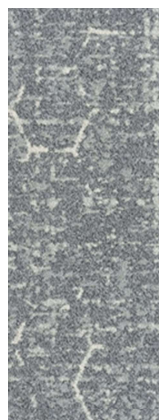

927 Serene Dark

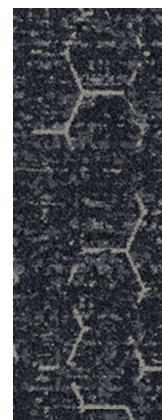


978 Oud Dark



981 Nocturnal Gold



989 Nocturnal Light

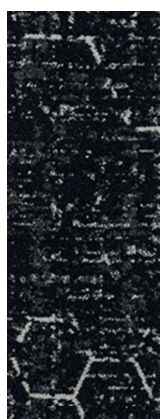

987 Nocturnal Silver





Pathmakers Collection

BA363 Concrete Bloom



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum SqYd:	No Minimum
SurfaceTexture:	TexturedPatternedLoop
Gauge:	1/12 (47.00 rows per 10 cm)
TuftedPile Weight:	22 oz/yd2 (746 g/m2)
Finished PileThickness:	2.93 mm
Total Thickness:	7.2 mm
StitchesPer Inch:	10.0 (39.37 per 10 cm)
Dye Method:	SolutionDyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain ReleaseTechnology:	Permanent, Built into Fiber
Soil ReleaseTechnology:	EcoSentry Soil Protection
Density:	8,280
Weight Density:	192,472
Backing Material:	EcoFlex One
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone, Random
Size:	12" x 36" (.3048 m x .9144 m)
Pattern Repeat:	Not Applicable
Foot Traffic Recommendation TARR:	Severe

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



565 Dewdrop



729 Serene Light



739 Birdsong Light



829 Wildwood Light



868 Wildwood Dark



859 Oud Light



927 Serene Dark



938 Birdsong Dark




745 Dewdrop Light




978 Oud Dark



981 Nocturnal Gold

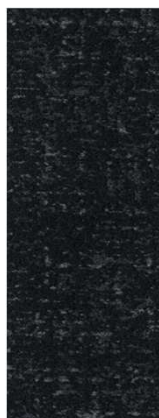

987 Nocturnal Silver

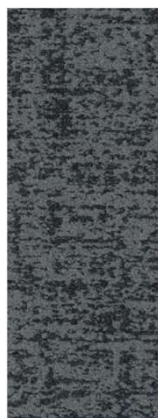

989 Nocturnal Light



Concrete Bloom 829



829
Focus



922
Sanctuary



946
Awakening




949
Easy Breezy



961
Harmony



965
Blue Bliss



967
Pause



969
Solitude

DESIGN

Tufted Pile Weight:	22 oz/yd2 (746 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	10,285
Weight Density:	226,285
Stitches Per Inch:	28.5 (112.20 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------




Fractal Ground 949

Relaxing Floors Collection


829
Focus

922
Sanctuary

946
Awakening

949
Easy Breezy

961
Harmony

965
Blue Bliss

967
Pause

969
Solitude

DESIGN

Tufted Pile Weight:	23 oz/yd2 (780 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12(47.00 rows per 10 cm)
Density:	9,409
Weight Density:	216,409
Stitches Per Inch:	28.5 (112.20 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



chillD 965

Relaxing Floors Collection



DESIGN

Tufted Pile Weight:	23 oz/yd2 (780 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	9,098
Weight Density:	209,274
Stitches Per Inch:	28.5 (112.20 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------


829
Focus

922
Sanctuary

946
Awakening

949
Easy Breezy

961
Harmony

965
Blue Bliss

967
Pause

969
Solitude



MellowD 829


829
Focus

922
Sanctuary

946
Awakening

949
Easy Breezy

961
Harmony

965
Blue Bliss

967
Pause

969
Solitude

DESIGN

Tufted Pile Weight:	22 oz/yd2 (746 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Multi-Colored Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Density:	10,025
Weight Density:	220,556
Stitches Per Inch:	28.5 (112.20 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144 m)
Installation Method:	Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



restD 967



949
Stone

DESIGN

Tufted Pile Weight:	24 oz/yd2 (814 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	6,595
Weight Density:	266,264
Stitches Per Inch:	10.1 (39.76 per 10 cm)
Finished Pile Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Stone Community 949



858
Bark

DESIGN

Tufted Pile Weight:	24 oz/yd2 (814 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	6,595
Weight Density:	266,264
Stitches Per Inch:	9.4 (37.01 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Bark Community 858



DESIGN

Tufted Pile Weight:	25 oz/yd2 (848 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	5,769
Weight Density:	266,264
Stitches Per Inch:	9.5 (37.4 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



831
Gold Dust Bark

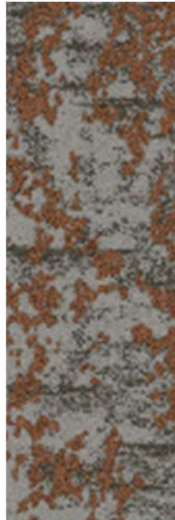


832
Sunburst Bark




837
Moonglow Bark




847
Velvet Snow Bark

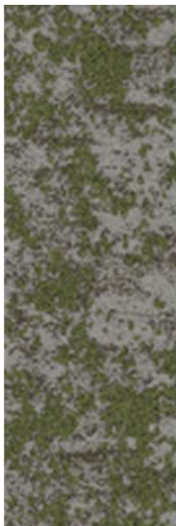


856
Jewel Leaf Bark

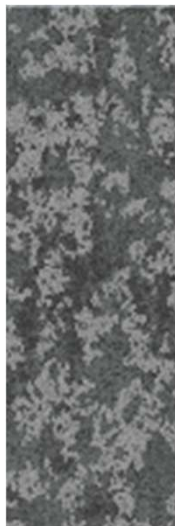


937
Map Rock Stone

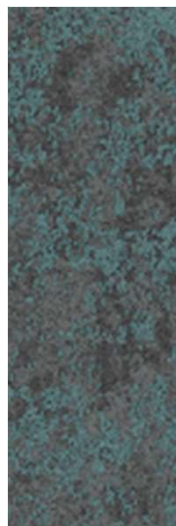

945
Sky Shield Stone

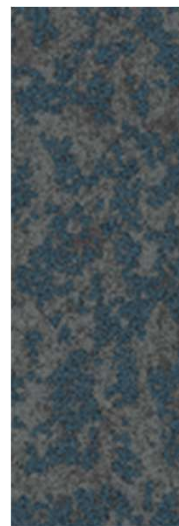

975
Felted Fringe Stone

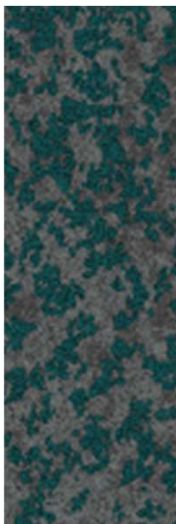

976
Drifted Root Stone



Macro Bloom II 856



DESIGN

Tufted Pile Weight:	24 oz/yd2 (814 g/m2)
Product Type:	Tile
Construction:	Tufted
Minimum Sq. Yd.:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12(47.00 rows per 10cm)
Density:	5,769
Weight Density:	266,264
Stitches Per Inch:	9.5 (37.4 per 10 cm)
Total Thickness:	7.2 mm
Dye Method:	Solution Dyed
Backing Material:	EcoFlex One
Fiber Type:	Duracolor® Tricor Premium Nylon
Fiber Technology:	Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.
Pattern Repeat:	Not Applicable
Size:	12" x 36" (.3048 m x .9144m)
Installation Method:	Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone
GSA Stain Release Rating:	Pass
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



831
Gold Dust Bark

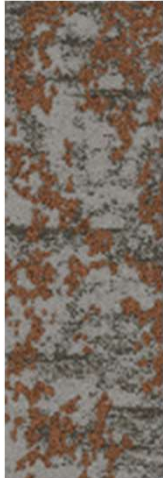


832
Sunburst Bark




837
Moonglow Bark




847
Velvet Snow Bark

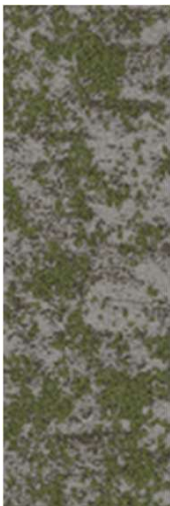

856
Jewel Leaf Bark

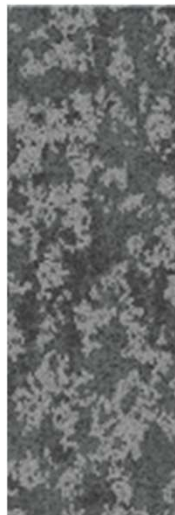


937
Map Rock Stone

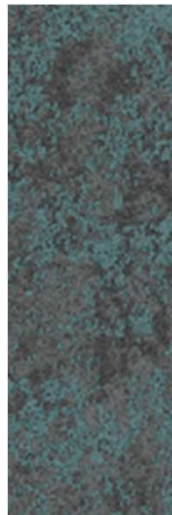

945
Sky Shield Stone



975
Felted Fringe Stone

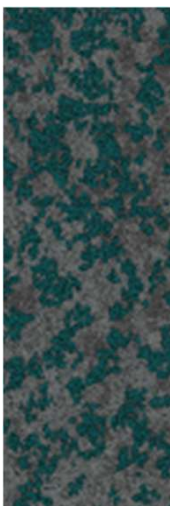

976
Drifted Root Stone



Micro Bloom II 945



DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	22 oz/yd2 (746 g/m2)
Finished Pile Thickness:	2.89 mm
Total Thickness: Stitches	7.2 mm
Per Inch:	9.5 (37.40 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	6,236
Weight Density:	137,196
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone
Size:	12" x 36" (.3048 m x .9144 m)
Pattern Repeat:	Not Applicable
Foot Traffic Recommendation TARR:	Heavy



949
Midtown



965
Waterfront



967
Downtown

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE


Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------



Urban Model II 949



922
Orange Line



946
Green Line



949
Grey Line



961
Gold Line



965
Blue Line



967
White Line

DESIGN

Product Type:	Tile
Construction:	Tufted
Minimum Sq Yd:	No Minimum
Surface Texture:	Textured Patterned Loop
Gauge:	1/12 (47.00 rows per 10 cm)
Tufted Pile Weight:	22 oz/yd2 (746 g/m2)
Finished Pile Thickness:	2.89 mm
Total Thickness: Stitches	7.2 mm
Per Inch:	9.5 (37.70 per 10 cm)
Dye Method:	Solution Dyed
Fiber Type:	Duracolor® Tricor Premium Nylon
Stain Release Technology:	Permanent, Built into Fiber
Soil Release Technology:	EcoSentry Soil Protection
Density:	6,187
Weight Density:	136,125
Backing Material:	EcoFlex One
Installation Method:	Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone
Size:	12" x 36" (.3048 m x .9144 m)
Pattern Repeat:	Not Applicable
Foot Traffic Recommendation TARR:	Heavy

SUSTAINABILITY

Material Health:	Declare Red List Free
NSF 140:	EcoFlex One-NSF 140 Platinum
EPD:	EcoFlex One EPD
Indoor Air Quality:	GLP 1170

PERFORMANCE

Static:	AATCC-134 Under 3.5 KV
Flammability:	ASTM E 648 Class 1(Glue Down)
Smoke Density:	ASTM E 662 Less than 450

SERVICE

Warranties:	Lifetime Limited Carpet Tile Warranty
-------------	---------------------------------------

Building Products Sustainability Certifications


Mohawk Group can support your sustainability goals by providing flooring solutions that meet the following certifications

Declare.

Declare Red List Free certified



**LIVING
PRODUCT
CHALLENGE**



Health Product
DECLARATION



RECOVER
RECYCLING PROGRAM

**THE
CLIMATE
PLEDGE**





Transparency

Leads to Verifiable, Healthy Choices

Our partnerships and product certifications are transforming the marketplace with well-being in mind. We design hard and soft surface flooring to meet the highest standards of green building certification programs around the world.


Global Green Building Certification Programs



**LIVING
BUILDING
CHALLENGE™**



As a champion of ILFI's stringent product certification programs, Mohawk Group is leading the flooring industry with the most Red List Free and Petal Certified Living Products.

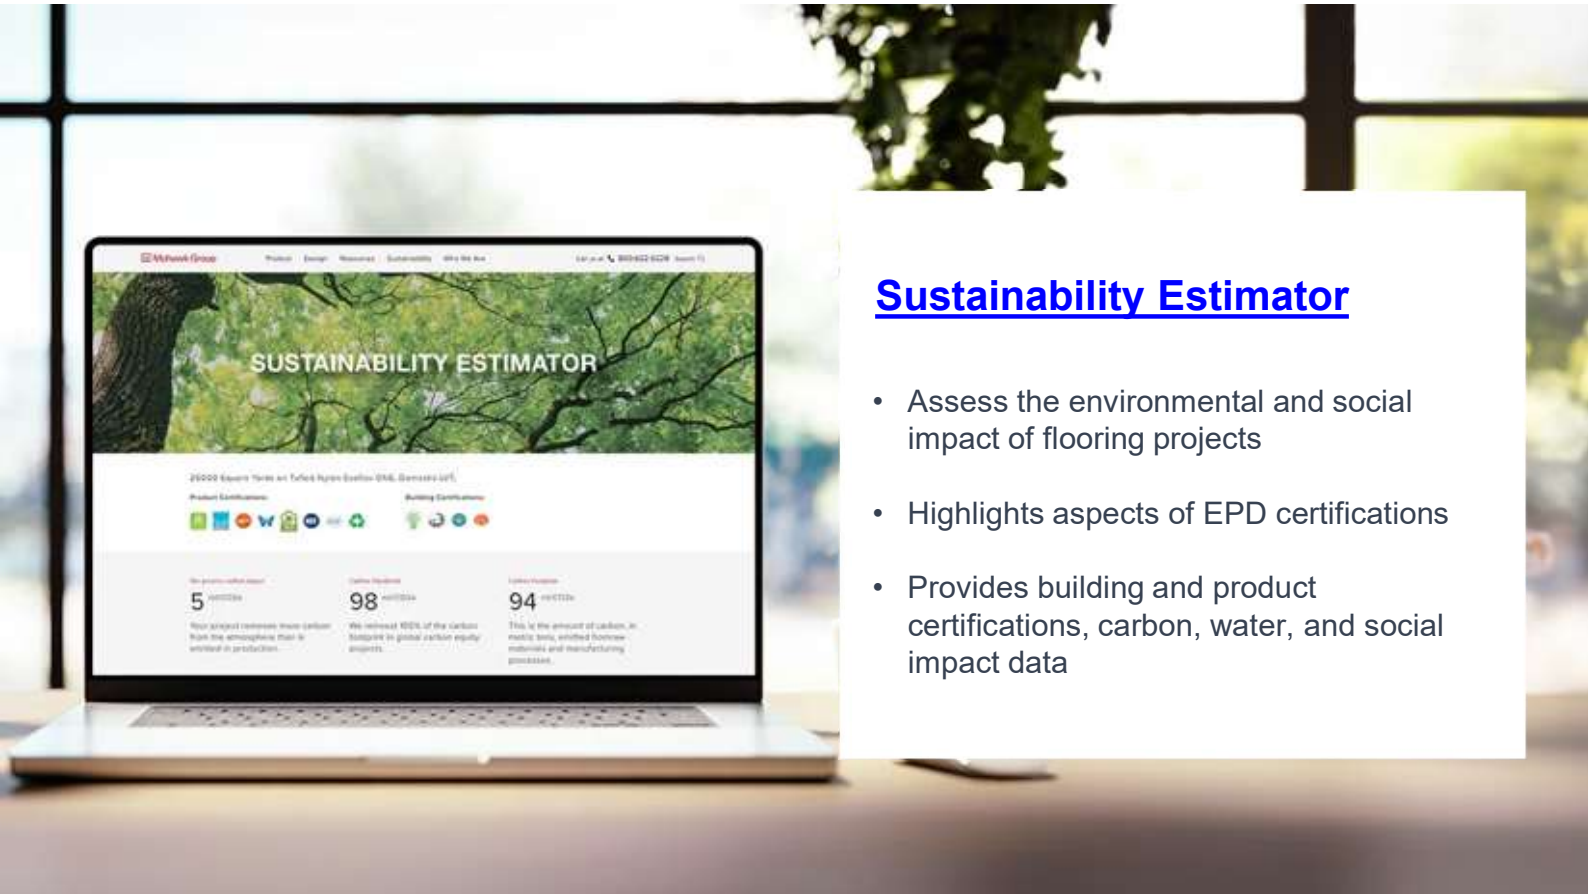

Sustainability Estimator

- Assess the environmental and social impact of flooring projects
- Highlights aspects of EPD certifications
- Provides building and product certifications, carbon, water, and social impact data

Check out the Sustainability Estimator

<https://www.mohawkgroup.com/estimator>

Commercial Carpet Tile

LIMITED LIFETIME WARRANTY

This limited warranty applies only to the original purchaser of Mohawk Group® carpet tiles for indoor commercial installations. This warranty applies only to product constructed with the following backing and fiber systems:

Backings:

EcoFlex® NXT, EcoFlex® AIR, EcoFlex® Matrix, and EcoFlex® ONE

Fibers:

Colorstrand, Duracolor, Antron or other Mohawk Group nylon fiber systems

The use of Mohawk Group branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk Group. Substrates must be prepared using Mohawk Group's recommended floor preparation procedures.

Provided the designated carpet has been properly installed and maintained in the specified commercial location in strict accordance with Mohawk Group's instructions and procedures and subject to the limitations set forth herein, including the specifications and manufacturing tolerances established for the product, Mohawk Group warrants to the original Owner, the following:

I. ITEMS UNDER WARRANTY

Mohawk Group warrants the following for the normal useful life of the carpet**:

1. **Wear** – Carpet tiles will not wear more than 10% of their surface pile weight from abrasive wear. "Abrasive wear" means fiber loss from the carpet through normal abrasion, not crushing or flattening of the carpet pile in any area, nor staining, soiling, fading, or change in carpet appearance, nor fiber loss due to abnormal usage of the carpet;
2. **Static** – Carpet tiles will not give static discharges in excess of 3.5 KV when tested under the step portion of AATCC Test Method 134 (Step);

3. **Edge Ravel/Zippering** – Carpet tiles will not edge ravel or zipper.
4. **Delamination** – Carpet tiles will not delaminate (chair pads are recommended for maximum appearance retention and to deter delamination);
5. **Dimensional Stability** – Carpet tiles will not lose their dimensional stability per the AACHEN test ISO 2551.

II. LIMITATIONS – THIS WARRANTY DOES NOT COVER

1. Disfigurement or damage caused by abnormal use or any damage to the carpet not arising out of a manufacturing defect in the carpet, including such disfigurement or damage as tears, burns, pulls, cuts, floods, excessive alkalinity, excessive moisture, installation on stairs, damage resulting from improper cleaning agents or methods, neglect, or damage in transit;
2. Edge ravel where carpet is cut for access to floor outlets and around trench header ducts;
3. Abuse by any athletic equipment such as roller skates, ski boots, or golf shoes;
4. Differential fading from light exposure, shading, pile crush, dye lot differences, or soiling;
5. Any condition that would have been visible upon inspection prior to the installation;
6. Any condition resulting from other than ordinary wear or from any use for which the product was not designed;
7. Any issues related to moisture and alkalinity in the substrate. Moisture and pH testing are not the responsibility of Mohawk Group.

III. OWNER OBLIGATIONS

1. Ownership is defined as the original purchaser of the floor; original proof of purchase may be required for a claim; this warranty is non-transferrable.
2. The original Owner must submit notice of all claims