Mohawk Group

goodrich®
Goodrich Global
SINCE 1983

2026/2027 CATALOG

APAC Collection







BELIEVE IN BETTER™

Mohawk Group



Mohawk Industries is the world's largest, most comprehensive flooring manufacturer.

$11.2 B
In Global Sales

43,000 +
Associates Worldwide

170 +
Countries With Sales & Operations

Ceramic Tile | Residential Carpet | Commercial Carpet | Area Rugs, Bath Rugs & Mats | Laminate Flooring | Luxury Vinyl Tile | Sheet Vinyl | Wood Flooring | Countertops

19
Countries With Manufacturing Facilities

25,000 +
Products With Recycled Content

25,000 +
Customers Worldwide

Mohawk Group

Mohawk Family of Brands




FOREVER
STAIN FREE • SUSTAINABLE • BEAUTIFUL
Mohawk Group
duracolor
FOREVER STAIN FREE

STAIN RESISTANCE THE SCIENCE



Common Nylon

The most common stains are caused by acid-based substances that carry a negative charge. Since most fibers are positively charged, the negatively charged acid-based substances are attracted to the opposite charge of the fibers and bond, creating a stain.



Duracolor Tricor


Duracolor Tricor fiber utilizes negatively charged polymers. The negative charge of the polymer ensures that the fiber, through its inherent characteristics, will repel negatively charged substances. The fiber never allows the common stain makers to bond, so the carpet resists the stain.

TRUSTED PERFORMANCE

Duracolor fiber has set the standard of high-performance commercial carpet since 1992. With enhanced soil hiding and removal capabilities, Duracolor Tricor builds upon a fiber already trusted to perform in demanding environments. When compared head to head to competitive nylon products, Duracolor Tricor delivers trusted performance.




Common Nylon Fiber

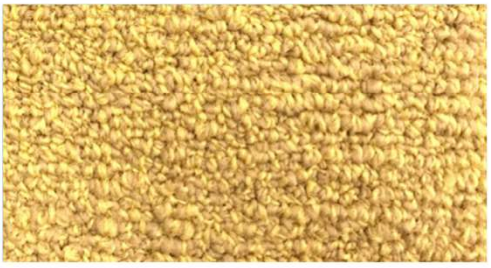



NEW CARPET WITH NO SOIL EXPOSURE



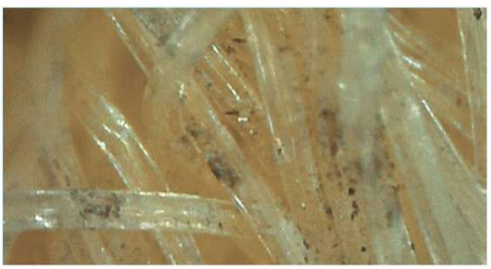

CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY




Duracolor Tricor Fiber






NEW CARPET WITH NO SOIL EXPOSURE



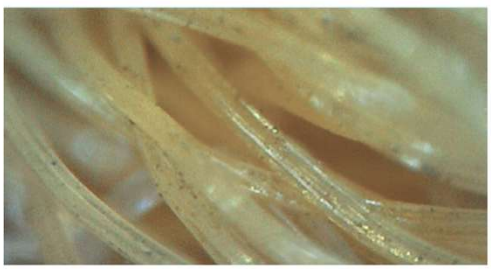

CARPET EXPOSED TO SOIL,
CLEANED USING VACUUM ONLY

Mohawk Group

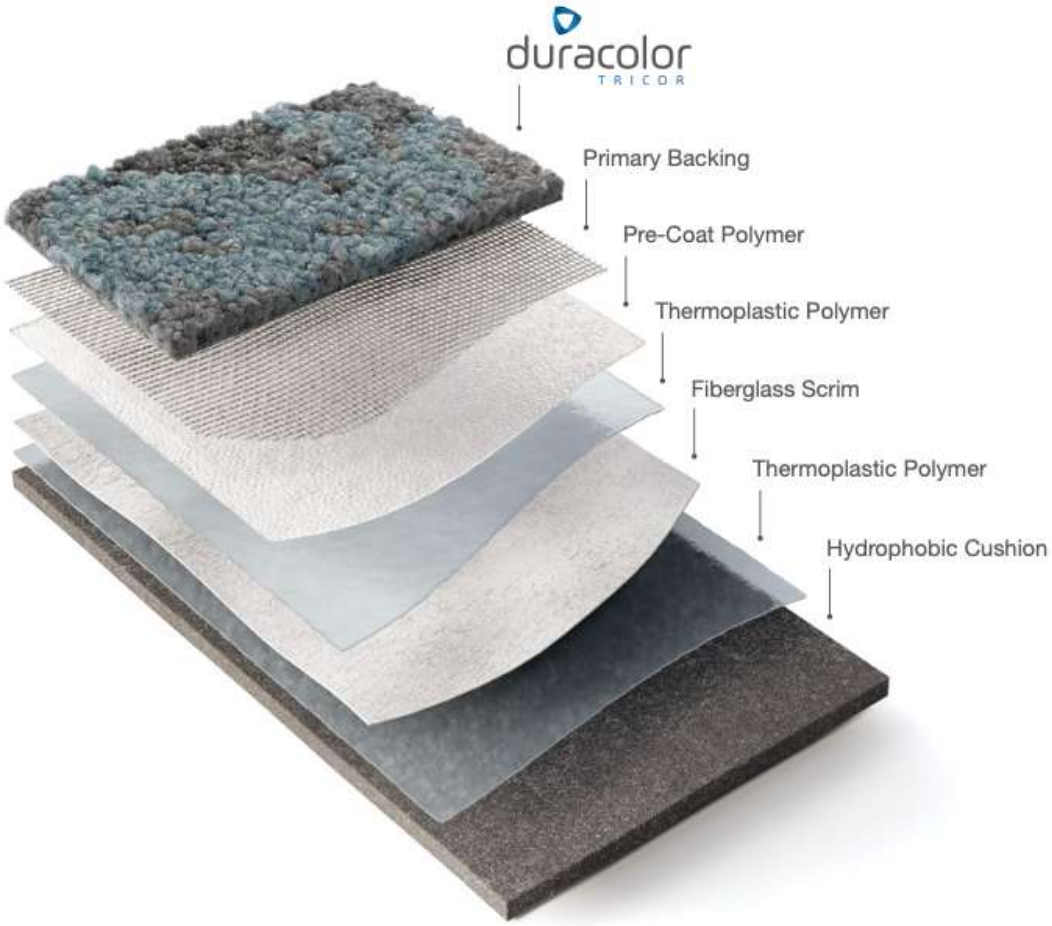

EcoFlex® ONE

ALL-IN-ONE FLOORING SOLUTION

Every element in the EcoFlex® ONE construction has purpose, and combined they form the industry's leading modular carpet solution. The hydrophobic PET cushion, backing layers, and Duracolor® Tricor fiber are engineered with your end-goals in mind: to optimize your investment, be sustainably made, and provide a better occupant experience.

KEY FEATURES

- Better Acoustics
- Enhanced Comfort & Safety
- Worry-Free Installation
- Simplified Maintenance
- NSF 140 Platinum
- Carbon Neutral +5%
- Limited Lifetime Warranty

EcoFlex® ONE is a unified solution to the wide range of needs in your spaces. This advanced backing system improves every aspect of comfort and acoustics while eliminating moisture testing—all with a lighter environmental footprint that is carbon neutral plus an additional 5% offset. Tested and proven, EcoFlex® ONE is the holistic solution for human-centric environments.

Mohawk Group

EcoFlex® AIR CARPET TILE BACKING WITH ATTACHED CUSHION

The next evolution in cushion backed carpet tile, EcoFlex® AIR offers substantial moisture management, sound reduction and enhanced comfort under foot. It also incorporates an average of 50% recycled content (pre- and post-consumer) by total product weight. Additionally, in most cases no moisture testing is required prior to installation.**

PERFORMANCE


- Tiles are impervious to moisture damage from spills and water extraction cleaning
- Allows subfloor moisture vapor to flow through the backing and escape from the seams**
- Provides permanent tile dimensional stability
- Noise Reduction Coefficient = 0.25; carpet tiles absorb 25% of ambient sound
- Impact Insulation Class—up to 73
- Performs up to 2x better reducing sound transmission than hard surfaces
- Construction features superior tuft bind that is highly resistant to edge ravel
- Reduces the risk of severe injury in the event of a slip or fall

SUSTAINABILITY

- Total 58% recycled content by finished product weight: 45% pre-consumer and 13% post-consumer recycled content
- PET Cushion layer of EcoFlex™ AIR contains a minimum of 90% post-consumer recycled content.
- Certified NSF/ANSI 140 Platinum with a minimum of 13% post-consumer recycled content.
- EcoFlex™ AIR may contribute to LEED v4, Living Building Challenge, and the WELL Building Standard
- Contains no plasticizers
- Red List Free

SERVICE

- Available as an option on all Mohawk Group carpet tiles, minimum square meter quantities may be required.
- Contact your sales representative for more information.

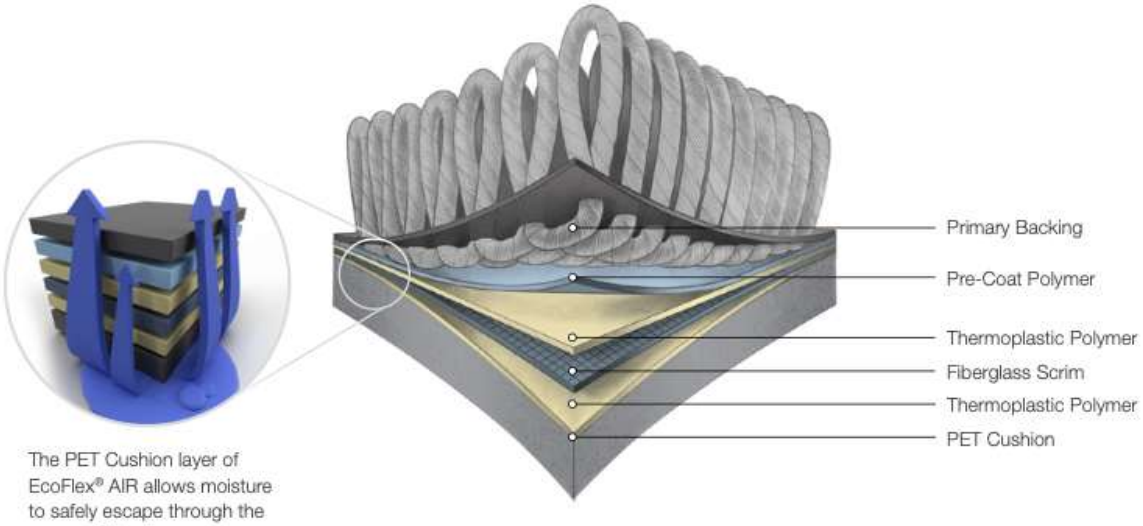

The PET Cushion layer of EcoFlex® AIR allows moisture to safely escape through the seams of the tile.


* Recycled content claim third party verified by UL (Underwriters Laboratory)
** Please consult Mohawk Group Installation Instructions for more details


Mohawk Group

FRACTAL VISION

COLLECTION OVERVIEW


RELAXING FLOORS

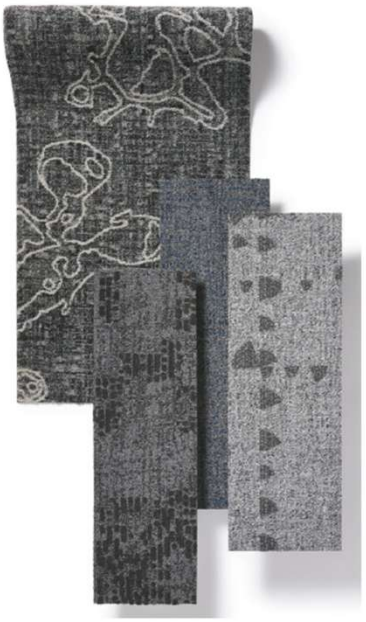

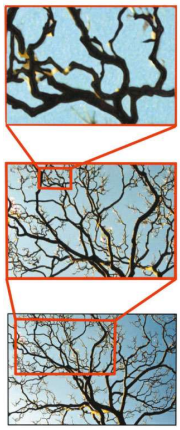



This collection is the culmination of art, science and human-centered design based on fractal patterns. Relaxing Floors utilizes fractals to tap into our innate affinity for nature and activate our bodies' stress-relieving response to similar patterns.

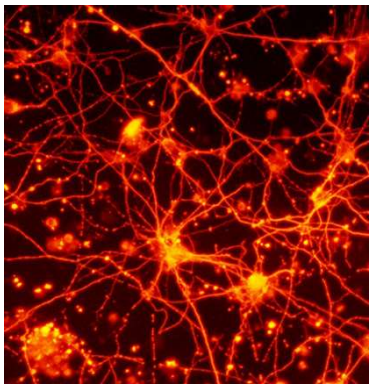








Pathmakers

By looking deeply into the world around us,we discover nature's systems of care—howeach part of an ecosystem is connectedand helps to sustain the whole. Even the tinybee is integral, its daily paths of pollinationgenerating new plants, in turn helping tosustain all life.With bees as inspiration, we created the Pathmakers carpet plank collection.

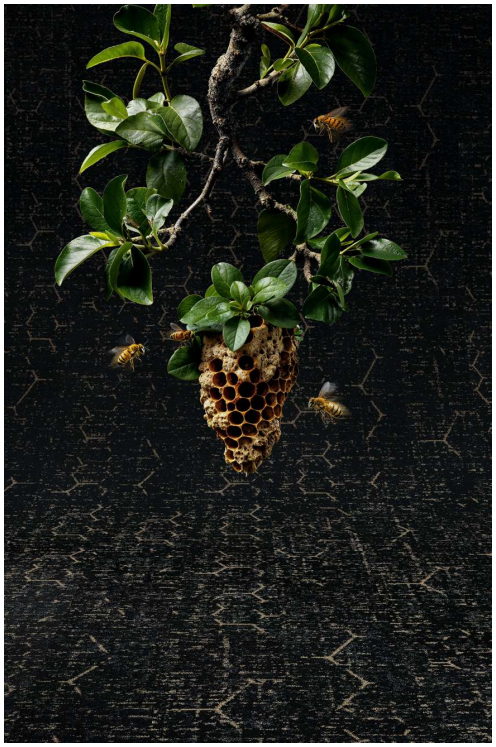




Mohawk Group

Smart City

Mohawk Group believes design is a journey, and our next stop is Smart City—a Living Product Certified carpet plank system inspired by some of the world's most connected places. Urban Model offers an intricate base texture presented in three distinctive hues and contrast levels, while Urban Mobility layers a metropolitan subway line pattern in six sophisticated color options.






New York



London



Shanghai




Berlin



Paris



Istanbul

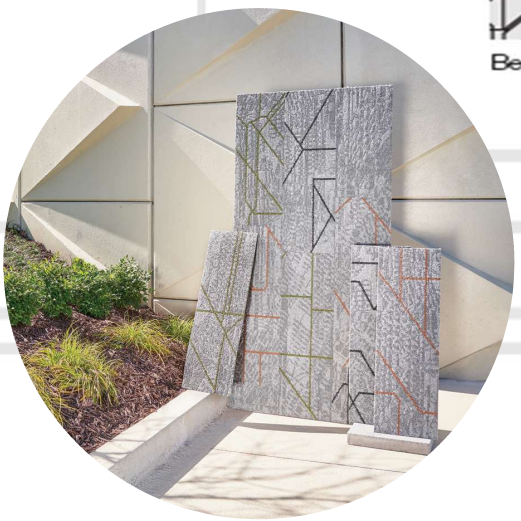



Mohawk Group

Lichen Community

The multi-hued, multi-textured lichens that thrive on bark and rock formations once again inspire us in Lichen Community collection. The refined Micro Bloom and Macro Bloom palette includes warm and cool background textures with more neutral and tonal accent colors, which can help to define communal spaces and create unique large-scale installations.







Mohawk Group

MG22005 Gradate

Moon Surface Collection



DESIGN

Tufted Pile Weight:	**15oz/yd2 (508 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Finished Pile Thickness:	**2.71 mm**
Total Thickness	**6.71 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (0.609 m x 0.609 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology: Soil Release	**Sentry Plus Stain Protection**
Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



878
Dark Taupe



959
Medium Grey



989
Dark Grey

Mohawk Group



Gradate 959

Mohawk Group

MG22006 Blend

Moon Surface Collection



DESIGN

Tufted Pile Weight:	**15oz/yd2 (508 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Finished Pile Thickness:	**2.71 mm**
Total Thickness	**6.71 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (0.609 m x 0.609 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology: Soil Release	**Sentry Plus Stain Protection**
Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



878
Dark Taupe



959
Medium Grey



989
Dark Grey

Mohawk Group




Blend 959 I Gradate 959

Mohawk Group

MG22007 Join

Moon Surface Collection

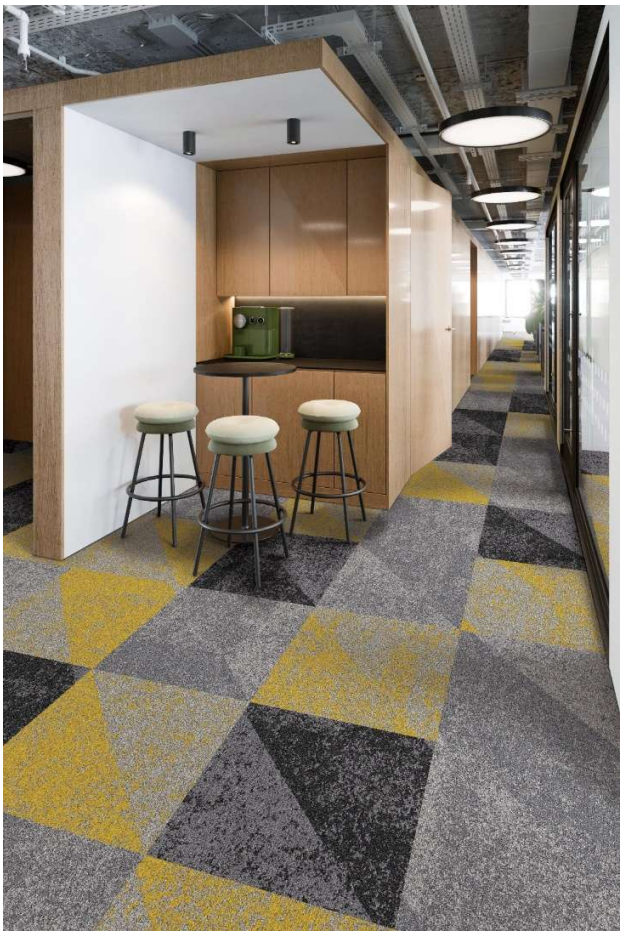

DESIGN

Tufted Pile Weight:	**15oz/yd2 (508 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Finished Pile Thickness:	**2.71 mm**
Total Thickness	**6.71 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (0.609 m x 0.609 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology: Soil Release	**Sentry Plus Stain Protection**
Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**


SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group


878 Dark Taupe



959 Medium Grey



989 Dark Grey


911 M. Sunlight


912 M. Page Pink


913 M. Solar



924 M. Copper Flame



923 M. Azalea


931 D. Sunlight


932 D. Page Pink


933 D. Solar



944 D. Copper Flame


923 D. Azalea


916 M. Jungle


915 M. Filtered



918 M. Aquarius


921 M. Waterfall


936 D. Jungle


935 D. Filtered


938 D. Aquarius


941 D. Waterfall


Join 959 | Join 918

Mohawk Group

Ground Breaking Collection

MG22008 Ground Breaking



DESIGN

Tufted Pile Weight:	**15oz/yd2 (508 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Finished Pile Thickness:	**2.52 mm**
Total Thickness	**6.52mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (0.609 m x 0.609 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology: Soil Release	**Sentry Plus Stain Protection**
Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**




535
Cornflower




839
Flaz




859
Taupe



929
Silver



949
Mineral



989
Charcoal

Mohawk Group



Ground Breaking 929

Mohawk Group

MG22009 Reconnect 2.0

Reconnect 2.0 Collection



DESIGN

Tufted Pile Weight:	**15oz/yd2 (508 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12(47.00 rows per 10 cm)**
Density:	**6,752**
Weight Density:	**106,146**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Finished Pile Thickness:	**2.91 mm**
Total Thickness	**6.91 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (0.609 m x 0.609 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**


PERFORMANCE


Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**


SERVICE


Warranties:	**Lifetime Limited Carpet Tile Warranty**


Mohawk Group



556A
Filtered



556B
Filtered



556C
Filtered



956A
Tangent Teal



956B
Tangent Teal


956C
Tangent Teal


656A
Jungle



656B
Jungle



656C
Jungle


943A
Fractal Fire



943B
Fractal Fire



943C
Fractal Fire



751A
Oatmeal



751B
Oatmeal



751C
Oatmeal



945A
Infinity Indigo


945B
Infinity Indigo


945C
Infinity Indigo


955A
Grey Metal


955B
Grey Metal


955C
Grey Metal

Mohawk Group



Reconnect 2.0 556ABC

Mohawk Group

BA436 Framed Structure Tile

Sketch Effect Collection





593
Navy Gray




929
Light Elm



937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal

DESIGN

Tufted Pile Weight:	**15 oz/yd2 (509 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,585**
Weight Density:	**98,780**
Stitches Per Inch:	**11.0 (43.31 per 10 cm)**
Total Thickness:	**6.5 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Quarter Turn, Monolithic, Vertical Ashlar, Brick Ashlar, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



Framed Structure 937

Mohawk Group

BA437 Shaded Lines Tile

Sketch Effect Collection



DESIGN

Tufted Pile Weight:	**15 oz/yd2 (509 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,000**
Weight Density:	**90,000**
Stitches Per Inch:	**11.0 (43.31 per 10 cm)**
Total Thickness:	**6.5 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**



593
Navy Gray



929
Light Elm



937
Steel



948
Brown Oak



979
Pencil Lead



989
Charcoal

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



Shaded Lines 593

Mohawk Group

BA496 Angled Perception Tile 12BY36

Visual Edge Collection



DESIGN

Tufted Pile Weight:	**15 oz/yd2 (509 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**5,192**
Weight Density:	**77,884**
Stitches Per Inch:	**11.0 (43.31 per 10 cm)**
Finished Pile Thickness:	**6.5 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Half Lap, Plank Half Lap, Herringbone**
Stain Release Technology:	**EcoSentry Plus Stain Protection**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**



593
Indigo Ink



929
Warm Neutral



937
Wet Cement



948
Rustic Taupe



979
Metal Grey



989
Dark Charcoal

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



Angled Perception 937

Mohawk Group

BA497 Hidden Dimension Tile 12BY36

Visual Edge Collection



DESIGN

Tufted Pile Weight:	**15 oz/yd2 (509 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**5,869**
Weight Density:	**88,043**
Stitches Per Inch:	**11.2 (44.09 per 10 cm)**
Total Thickness:	**6.5 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone**
Stain Release Technology:	**EcoSentry Plus Stain Protection**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



593
Indigo Ink



929
Warm Neutral



937
Wet Cement



948
Rustic Taupe



979
Metal Grey



989
Dark Charcoal


Hidden Dimension 979

Mohawk Group

BA598 Base Layer

Substratum Collection




DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**8,100**
Weight Density:	**105,077**
Stitches Per Inch:	**10.4 (40.94 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Brick Ashlar, Side Match**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**




593
Wellspring



626
Meadow



868
Yarrow



924
Moraine



957
Freshwater



958
Seedbed



959
Peppercorn



989
Rooted

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Base Layer 593

Mohawk Group

BA597 Natural Networks

Substratum Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**8,100**
Weight Density:	**105,077**
Stitches Per Inch:	**10.4 (40.94 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Brick Ashlar, Side Match**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**



593
Wellspring



626
Meadow



868
Yarrow



924
Moraine



957
Freshwater



958
Seedbed



959
Peppercorn



989
Rooted

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Natural Networks 626

Mohawk Group

BA599 Corresponding Angle

Shape Theory Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**8,100**
Weight Density:	**105,077**
Stitches Per Inch:	**11.4 (44.88 per 10 cm)**
Total Thickness:	**6.8 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Brick Ashlar, Multi-Directional, Quarter Turn Side Match, Vertical Ashlar**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY


Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE


Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



933
Pi Pink



936
Parabola Peridot



943
Fractal Fire



944
Polygon



945
Infinity Indigo



946
Integral Ivy



955
Aqua Apex



956
Tangent Teal



971
Golden Ratio



972
Calculations



973
Sunset Sequences



975
Ice Inverse



977
Iron Index



987
Discrete Diamond



988
Tessellation Taupe



989
Ink Integer


Corresponding Angle 936

Mohawk Group

BA600 Cartesian Plane

Shape Theory Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**8,100**
Weight Density:	**105,077**
Stitches Per Inch:	**11.5 (45.28 per 10 cm)**
Total Thickness:	**6.8 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Quarter TurnSide, Match Vertical** **Ashlar Brick, Ashlar Multi-Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY


Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE


Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE


Warranties:	**Lifetime Limited Carpet Tile Warranty**




933
Pi Pink




936
Parabola Peridot



943
Fractal Fire



944
Polygon




945
Infinity Indigo



946
Integral Ivy



955
Aqua Apex



956
Tangent Teal



971
Golden Ratio



972
Calculations



973
Sunset Sequences



975
Ice Inverse



977
Iron Index



987
Discrete Diamond



988
Tessellation Taupe



989
Ink Integer



Cartesian Plane 973 | 987

Mohawk Group

BA426 Creative Spark

Creative Spark Collection



DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/10 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (39.37 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE


Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Mohawk Group

BA426 Creative Spark


131
Sunny Disposition


252
Nurturing Nectarine



332
Pondering Petal


354
Reflective Raspberry


363
Cheerful Cherry


484
Uplifting Ultraviole


545
Dynamic Dewdro


546
Loving Lagoon


547
Spirited Sky


565
Serendipity Sapphire


569
Sentimental Steel


575
Moody Blue


589
Independent Indigo


646
Enchanting Eucalyptu


651
Graceful Green


656
Playful Pine


675
Tranquil Teal



686
Friendly Fern


854
Subtle Sepia


858
Dreamy Driftwood


862
Blissful Broze



888
Unruly Umber


889
Patient Pepper


917
Whimsical Whisper



928A
Mushroom



935
Zesty Zinc


939
Goofy Gray


949
Silly Stone


954
Sublime Silver


969
Serendipitous Slate


989
Carbon


999
Mesmerizing Midnight

* China available color highlighted in red



Creative Spark 131 I 939 I 989 I 252

Mohawk Group

BA432 Adaptable Tile

Art Exposure Collection





569
Cadet



853
Fallow



924
Platinum



958
Ecru



959
Slate



989
Charcoal

DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,181**
Weight Density:	**105,077**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Vertical Ashlar, Quarter Turn, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Adaptable 989

Mohawk Group

BA433 Academic View Tile

Art Exposure Collection







569
Cadet




853
Fallow




924
Platinum



958
Ecru



959
Slate



989
Charcoal

DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,725**
Weight Density:	**114,625**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Academic View 924

Mohawk Group

BA455 Enlivened Tile

Art Exposure Collection






569
Cadet



853
Fallow



924
Platinum



958
Ecru



959
Slate



989
Charcoal

DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**6,580**
Weight Density:	**111,860**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**24" x 24" (.6096 m x .6096 m)**
Installation Method:	**Quarter Turn, Vertical Ashlar, Brick Ashlar, Monolithic, Multi Directional**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Enlivened 924

Mohawk Group

BA429 Shared Path Tile 12BY36

Art Style Collection





569
Cadet



853
Fallow



924
Platinum



958
Ecru



959
Slate



989
Charcoal

DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**8,383**
Weight Density:	**142,520**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Severe**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Shared Path 924 | 989ç

Mohawk Group

BA430 Disruptive Path Tile 12BY36

Art Style Collection



DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**7,285**
Weight Dcensity:	**123,857**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Severe**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



911
Mellow Yellow



913
Orange Crush



914
Purple Dawn



915
Blue Dusk



916
Lime Rush



919
Pink Berry



931
Neon Citron



933
Crimson Flash



944
Cotton Candy



946
Above Par



954
Purple Ash



955
Cosmic Sky


Shared Path 924 I Disruptive Path 913

Mohawk Group

BA431 Metallic Path Tile 12BY36

Art Style Collection





559
Cadet Blaze



859
Fallow Reflection



929
Platinum Gleam



939
Ecru Glimmer



949
Slate Burst



979
Charcoal Spark

DESIGN

Tufted Pile Weight:	**17 oz/yd2 (576 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**7,846**
Weight Density:	**133,384**
Stitches Per Inch:	**12.0 (47.24 per 10 cm)**
Total Thickness:	**6.9 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex Air**
Fiber Type:	**Colorstrand® SD Nylon**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Protection**
Foot Traffic Recommendation TARR:	**Severe**

SUSTAINABILITY

Material Health:	**Declare**
NSF 140:	**EcoFlex Air-NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Metallic Path 949

Mohawk Group

BA450 Field of View Light

Optic Reset Collection





282
Fresco Light



585
Indigo Light



696
Verdigris Light



868
Nuance Light



957
Ferro Light



959
Moonlit Light



979
Silhouette Light



987
Cinematic Light



988
Undertone Light

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**6.92 mm**
Stitches Per Inch:	**12.3 (48.43 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**5,062**
Weight Density:	**91,125**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Field of View Light 868

Mohawk Group

BA449 Field of View Dark

Optic Reset Collection





282
Fresco Dark



585
Indigo Dark



696
Verdigris Dark



868
Nuance Dark



957
Ferro Dark



959
Moonlit Dark



979
Silhouette Dark



987
Cinematic Dark



988
Undertone Dark

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**6.92 mm**
Stitches Per Inch:	**12.1 (47.64 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**5,400**
Weight Density:	**97,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


Field of View Dark 988

Mohawk Group

BA448 Shifted Focus

Optic Reset Collection





282
Fresco



585
Indigo



696
Verdigris



868
Nuance



957
Ferro



959
Moonlit



979
Silhouette



987
Cinematic



988
Undertone

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**6.92 mm**
Stitches Per Inch:	**12.4 (48.82 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**4,695**
Weight Density:	**84,521**
Backing Material:	**EcoFlex One**
Installation Method:	**Brick Ashlar, Random, Half Lap, Plank Half Lap, Basket Weave, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Shifted Focus 987

Mohawk Group

BA477 LineD

Fractal Fluency Collection





535
Cornflower



545
Royal



839
Flax



859
Taupe



929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.17 mm**
Total Thickness:	**6.97 mm**
Stitches Per Inch:	**12.1 (47.64 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**5,445**
Weight Density:	**97,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



LineD 949

Mohawk Group

BA478 SquareD

Fractal Fluency Collection





535
Cornflower



545
Royal



839
Flax



859
Taupe



929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.17 mm**
Total Thickness:	**6.97 mm**
Stitches Per Inch:	**12.1 (47.64 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**5,184**
Weight Density:	**97,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**




SquareD 839

Mohawk Group

BA609 ExploreD

Fractal Findings Collection

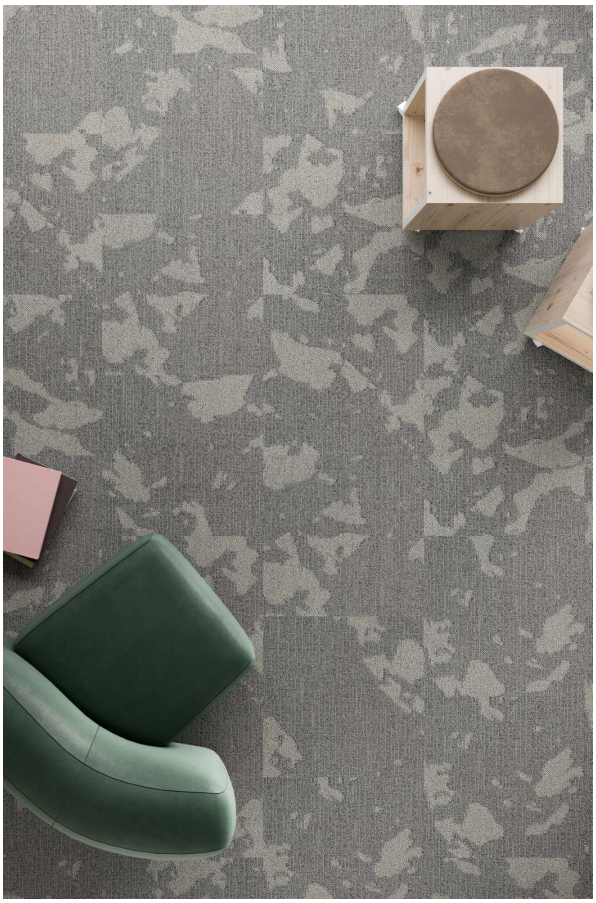

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**19 oz/yd2 (644 g/m2)**
Finished Pile Thickness:	**3.17 mm**
Total Thickness:	**6.97 mm**
Stitches Per Inch:	**12.1 (47.64 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Colorstrand® SD Nylon**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Treatment**
Density:	**5,516**
Backing Material:	**EcoFlex Air**
Installation Method:	**Brick Ashlar, Multi Directional, Quarter Turn, Vertical Ashlar**
Size:	**24" x 24" (609 cm x 609 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex Air -NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



822
Marmot




826
Portage




827
Snow Dome



829
Sable



853
Caribou



855
Windswept



856
Grand Pacific



857
Silverthrone



975
Raven



976
Serene



977
Beluga



ExploreD 855

Mohawk Group

BA610 DiscoverD

Fractal Findings Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**19 oz/yd2 (644 g/m2)**
Finished Pile Thickness:	**3.17 mm**
Total Thickness:	**6.97 mm**
Stitches Per Inch:	**12.1 (47.64 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Colorstrand® SD Nylon**
Stain Release Technology:	**Sentry Plus Stain Protection**
Soil Release Technology:	**Sentry Soil Treatment**
Density:	**5,516**
Backing Material:	**EcoFlex Air**
Installation Method:	**Brick Ashlar, Multi Directional, Quarter Turn, Vertical Ashlar**
Size:	**24" x 24" (609 cm x 609 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex Air -NSF 140 Platinum**
EPD:	**EcoFlex Air EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



822
Marmot




826
Portage




827
Snow Dome



829
Sable




853
Caribou




855
Windswept




856
Grand Pacific



857
Silverthrone



975
Raven



976
Serene



977
Beluga


Discovered 977

Mohawk Group

BA470 Visual Connections

Timeless Tailored Collection





535
Cornflower



545
Royal



839
Flax



859
Taupe



929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**18 oz/yd2 (610 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**7.1 mm**
Stitches Per Inch:	**13.5 (51.35 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**6,893**
Weight Density:	**9 7,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Visual Connections 859

Mohawk Group

BA468 Unexpected Detail

Timeless Tailored Collection





535
Cornflower



545
Royal



839
Flax



859
Taupe



929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**19 oz/yd2 (644 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**7.1 mm**
Stitches Per Inch:	**13.9 (54.72 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**6,000**
Weight Density:	**9 7,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Unexpected Details 949

Mohawk Group

BA469 Distressed Twill

Timeless Tailored Collection





535
Cornflower



545
Royal



839
Flax



859
Taupe



929
Silver



949
Mineral



969
Iron



989
Charcoal

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**19 oz/yd2 (644 g/m2)**
Finished Pile Thickness:	**3.12 mm**
Total Thickness:	**7.1 mm**
Stitches Per Inch:	**13.9 (54.72 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**6,000**
Weight Density:	**9 7,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Distressed Twill 929 I 949

Mohawk Group

BA366 Wild Horizon

Wild Horizon Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.24 rows per 10 cm)**
Tufted Pile Weight:	**19 oz/yd2 (644 g/m2)**
Finished Pile Thickness:	**3.75 mm**
Total Thickness:	**7.3 mm**
Stitches Per Inch:	**13.5 (51.35 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Treatment**
Density:	**6,893**
Weight Density:	**97,200**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Random, Herringbone**
Size:	**12" x 36" (30.48 cm x 91.44 cm)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



726
White Trillium



727
Plumegrass



732
Trumpet Honeysuckle



739
Wiregrass



745
Dayflower



749
Gray Dogwood



863
Scarlet Creeper



867
Broomsedge



954
Wild Rye



955
Bluebonnet



971
Goldenrod



977
Black Willow



Wild Horizons 739 I Cus. Yellow accent

Mohawk Group

BA405 Color Balance Tile 12BY36





141
Sunlight



252
Solar



373
Atomic



656
jungle



839
Bone



859
Roasted



937
Optic



949
Concrete



959
Bedrock



969
Titanium



979
Magnetic



989
Shadow

DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq Yd:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**20 oz/yd2 (678 g/m2)**
Total Thickness:	**7.3 mm**
Stitches Per Inch:	**10.8 (45.52 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Density:	**5,853**
Weight Density:	**117,073**
Backing Material:	**EcoFlex One**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
Size:	**12" x 36" (.3048 m x .9144 m)**
Pattern Repeat:	**Not Applicable**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Color Balance 937 I 959 I 979

Mohawk Group

BA362 Pollinator Path

Pathmakers Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Finished Pile Thickness:	**2.93 mm**
Total Thickness:	**7.2 mm**
Stitches Per Inch:	**10.0 (39.37 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Density:	**8,280**
Weight Density:	**192,472**
Backing Material:	**EcoFlex One**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone, Random**
Size:	**12" x 36" (.3048 m x .9144 m)**
Pattern Repeat:	**Not Applicable**
Foot Traffic Recommendation TARR:	**Severe**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group


565 Dewdrop Dark


729 Serene Light


739 Birdsong Light


745 Dewdrop Light


829 Wildwood Light


859 Oud Light


868 Wildwood Dark



938 Birdsong Dark


927 Serene Dark


978 Oud Dark


981 Nocturnal Gold


989 Nocturnal Light

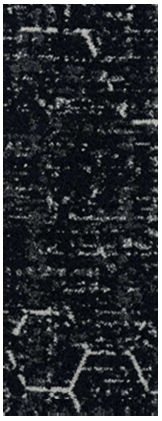
987 Nocturnal Silver

Mohawk Group



Pollinator Path 829

Mohawk Group

BA363 Concrete Bloom

Pathmakers Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum SqYd:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Finished Pile Thickness:	**2.93 mm**
Total Thickness:	**7.2 mm**
Stitches Per Inch:	**10.0 (39.37 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Density:	**8,280**
Weight Density:	**192,472**
Backing Material:	**EcoFlex One**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Herringbone, Random**
Size:	**12" x 36" (.3048 m x .9144 m)**
Pattern Repeat:	**Not Applicable**
Foot Traffic Recommendation TARR:	**Severe**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group


565 Dewdrop


729 Serene Light


739 Birdsong Light


829 Wildwood Light


868 Wildwood Dark


859 Oud Light


927 Serene Dark


938 Birdsong Dark


745 Dewdrop Light


978 Oud Dark


981 Nocturnal Gold


987 Nocturnal Silver


989 Nocturnal Light


Concrete Bloom 829

Mohawk Group

BA425 Fractal Ground

Relaxing Floors Collection





829
Focus



922
Sanctuary



946
Awakening



949
Easy Breezy



961
Harmony



965
Blue Bliss



967
Pause



969
Solitude

DESIGN

Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**10,285**
Weight Density:	**226,285**
Stitches Per Inch:	**28.5 (112.20 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Fractal Ground 949

Mohawk Group

BA424 chillD

Relaxing Floors Collection






829
Focus



922
Sanctuary



946
Awakening



949
Easy Breezy



961
Harmony



965
Blue Bliss



967
Pause



969
Solitude

DESIGN

Tufted Pile Weight:	**23 oz/yd2 (780 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12(47.00 rows per 10 cm)**
Density:	**9,409**
Weight Density:	**216,409**
Stitches Per Inch:	**28.5 (112.20 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


chillD 965

Mohawk Group

BA426 mellowD

Relaxing Floors Collection






829
Focus



922
Sanctuary



946
Awakening



949
Easy Breezy



961
Harmony



965
Blue Bliss



967
Pause



969
Solitude

DESIGN

Tufted Pile Weight:	**23 oz/yd2 (780 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**9,098**
Weight Density:	**209,274**
Stitches Per Inch:	**28.5 (112.20 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


MellowD 829

Mohawk Group

BA427 restD

Relaxing Floors Collection





829
Focus



922
Sanctuary



946
Awakening



949
Easy Breezy



961
Harmony



965
Blue Bliss



967
Pause



969
Solitude

DESIGN

Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Multi-Colored Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Density:	**10,025**
Weight Density:	**220,556**
Stitches Per Inch:	**28.5 (112.20 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144 m)**
Installation Method:	**Monolithic, Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Monolithic Stepping, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**


restD 967

Mohawk Group

BA472 Stone Community

Lichen Community Collection



DESIGN

Tufted Pile Weight:	**24 oz/yd2 (814 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12(47.00 rows per 10cm)**
Density:	**6,595**
Weight Density:	**266,264**
Stitches Per Inch:	**10.1 (39.76 per 10 cm)**
Finished Pile Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144m)**
Installation Method:	**Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**



949
Stone

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class1(Glue Down)**
Smoke Density:	**ASTM E 662 Lessthan 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Stone Community 949

Mohawk Group

BA473 Bark Community

Lichen Community Collection





858
Bark

DESIGN

Tufted Pile Weight:	**24 oz/yd2 (814 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12(47.00 rows per 10cm)**
Density:	**6,595**
Weight Density:	**266,264**
Stitches Per Inch:	**9.4 (37.01 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144m)**
Installation Method:	**Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Bark Community 858

Mohawk Group

BA474 Macro Bloom II

Lichen Community Collection



DESIGN

Tufted Pile Weight:	**25 oz/yd2 (848 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12(47.00 rows per 10cm)**
Density:	**5,769**
Weight Density:	**266,264**
Stitches Per Inch:	**9.5 (37.4 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144m)**
Installation Method:	**Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**


SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



831
Gold Dust Bark

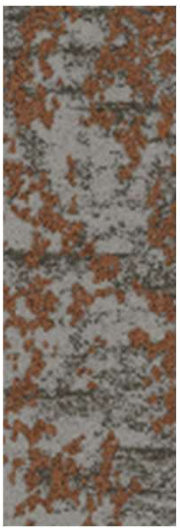


832
Sunburst Bark




837
Moonglow Bark




847
Velvet Snow Bark

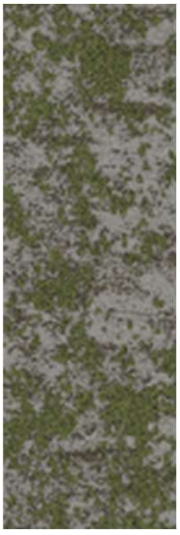


856
Jewel Leaf Bark

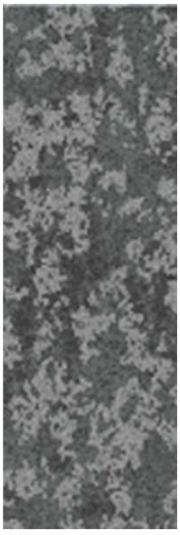


937
Map Rock Stone

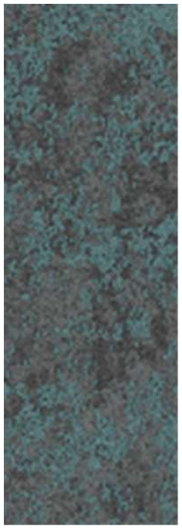

945
Sky Shield Stone

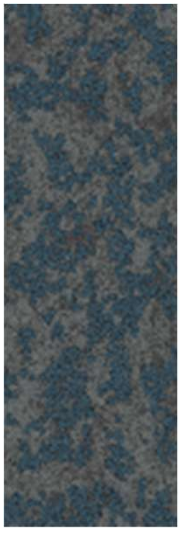

975
Felted Fringe Stone

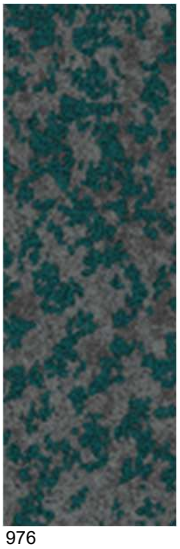

976
Drifted Root Stone



Macro Bloom II 856

Mohawk Group

BA475 Micro Bloom II

Lichen Community Collection



DESIGN

Tufted Pile Weight:	**24 oz/yd2 (814 g/m2)**
Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq. Yd.:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12(47.00 rows per 10cm)**
Density:	**5,769**
Weight Density:	**266,264**
Stitches Per Inch:	**9.5 (37.4 per 10 cm)**
Total Thickness:	**7.2 mm**
Dye Method:	**Solution Dyed**
Backing Material:	**EcoFlex One**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Fiber Technology:	**Duracolor® by Mohawk Group's Stain Resistant System. Passes GSA requirements for permanent stain resistant carpet.**
Pattern Repeat:	**Not Applicable**
Size:	**12" x 36" (.3048 m x .9144m)**
Installation Method:	**Monolithic, Monolithic Stepping, Plank Half Lap, Basket Weave, Half Lap, Brick Ashlar, Random, Herringbone**
GSA Stain Release Rating:	**Pass**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Foot Traffic Recommendation TARR:	**Heavy**

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**


SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group



831
Gold Dust Bark

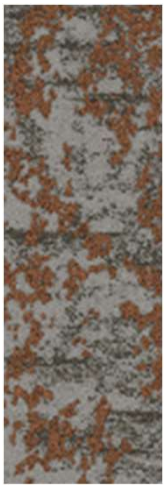


832
Sunburst Bark




837
Moonglow Bark




847
Velvet Snow Bark

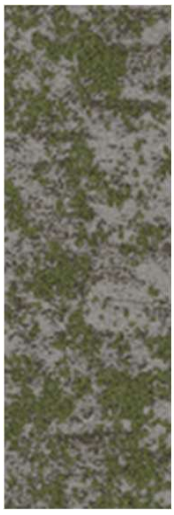


856
Jewel Leaf Bark

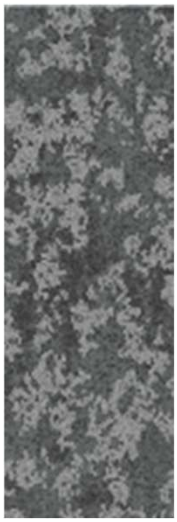


937
Map Rock Stone

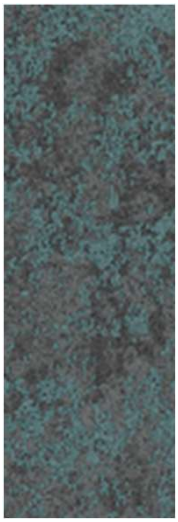

945
Sky Shield Stone

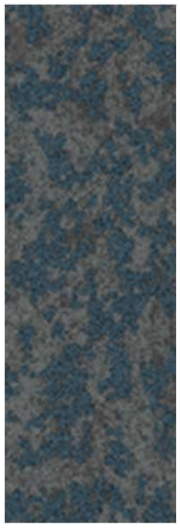

975
Felted Fringe Stone

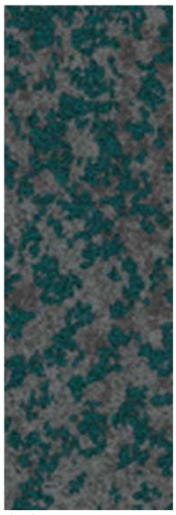

976
Drifted Root Stone



Micro Bloom II 945

Mohawk Group

BA429 Urban Model

Smart City Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq Yd:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Finished Pile Thickness:	**2.89 mm**
Total Thickness: Stitches	**7.2 mm**
Per Inch:	**9.5 (37.40 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Density:	**6,236**
Weight Density:	**137,196**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone**
Size:	**12" x 36" (.3048 m x .9144 m)**
Pattern Repeat:	**Not Applicable**
Foot Traffic Recommendation TARR:	**Heavy**



949
Midtown



965
Waterfront



967
Downtown

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1 (Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**



Urban Model II 949

Mohawk Group

BA430 Urban Mobility

Smart City Collection



DESIGN

Product Type:	**Tile**
Construction:	**Tufted**
Minimum Sq Yd:	**No Minimum**
Surface Texture:	**Textured Patterned Loop**
Gauge:	**1/12 (47.00 rows per 10 cm)**
Tufted Pile Weight:	**22 oz/yd2 (746 g/m2)**
Finished Pile Thickness:	**2.89 mm**
Total Thickness: Stitches	**7.2 mm**
Per Inch:	**9.5 (37.70 per 10 cm)**
Dye Method:	**Solution Dyed**
Fiber Type:	**Duracolor® Tricor Premium Nylon**
Stain Release Technology:	**Permanent, Built into Fiber**
Soil Release Technology:	**EcoSentry Soil Protection**
Density:	**6,187**
Weight Density:	**136,125**
Backing Material:	**EcoFlex One**
Installation Method:	**Half Lap, Brick Ashlar, Basket Weave, Plank Half Lap, Random, Herringbone**
Size:	**12" x 36" (.3048 m x .9144 m)**
Pattern Repeat:	**Not Applicable**
Foot Traffic Recommendation TARR:	**Heavy**



922
Orange Line



946
Green Line



949
Grey Line



961
Gold Line



965
Blue Line



967
White Line

SUSTAINABILITY

Material Health:	**Declare Red List Free**
NSF 140:	**EcoFlex One-NSF 140 Platinum**
EPD:	**EcoFlex One EPD**
Indoor Air Quality:	**GLP 1170**

PERFORMANCE

Static:	**AATCC-134 Under 3.5 KV**
Flammability:	**ASTM E 648 Class 1(Glue Down)**
Smoke Density:	**ASTM E 662 Less than 450**

SERVICE

Warranties:	**Lifetime Limited Carpet Tile Warranty**

Mohawk Group

Building Products Sustainability Certifications

Mohawk Group can support your sustainability goals by providing flooring solutions that meet the following certifications



Mohawk Group

Transparency

Leads to Verifiable, Healthy Choices

Our partnerships and product certifications are transforming the marketplace with well-being in mind. We design hard and soft surface flooring to meet the highest standards of green building certification programs around the world.

Global Green Building Certification Programs

SINGAPORE GREEN BUILDING PRODUCT SGBC LEADER

LEED v4


LIVING BUILDING CHALLENGE™

INTERNATIONAL WELL BUILDING INSTITUTE WELL

INTERNATIONAL LIVING FUTURE INSTITUTE℠

As a champion of ILFI's stringent product certification programs, Mohawk Group is leading the flooring industry with the most Red List Free and Petal Certified Living Products.

Mohawk Group

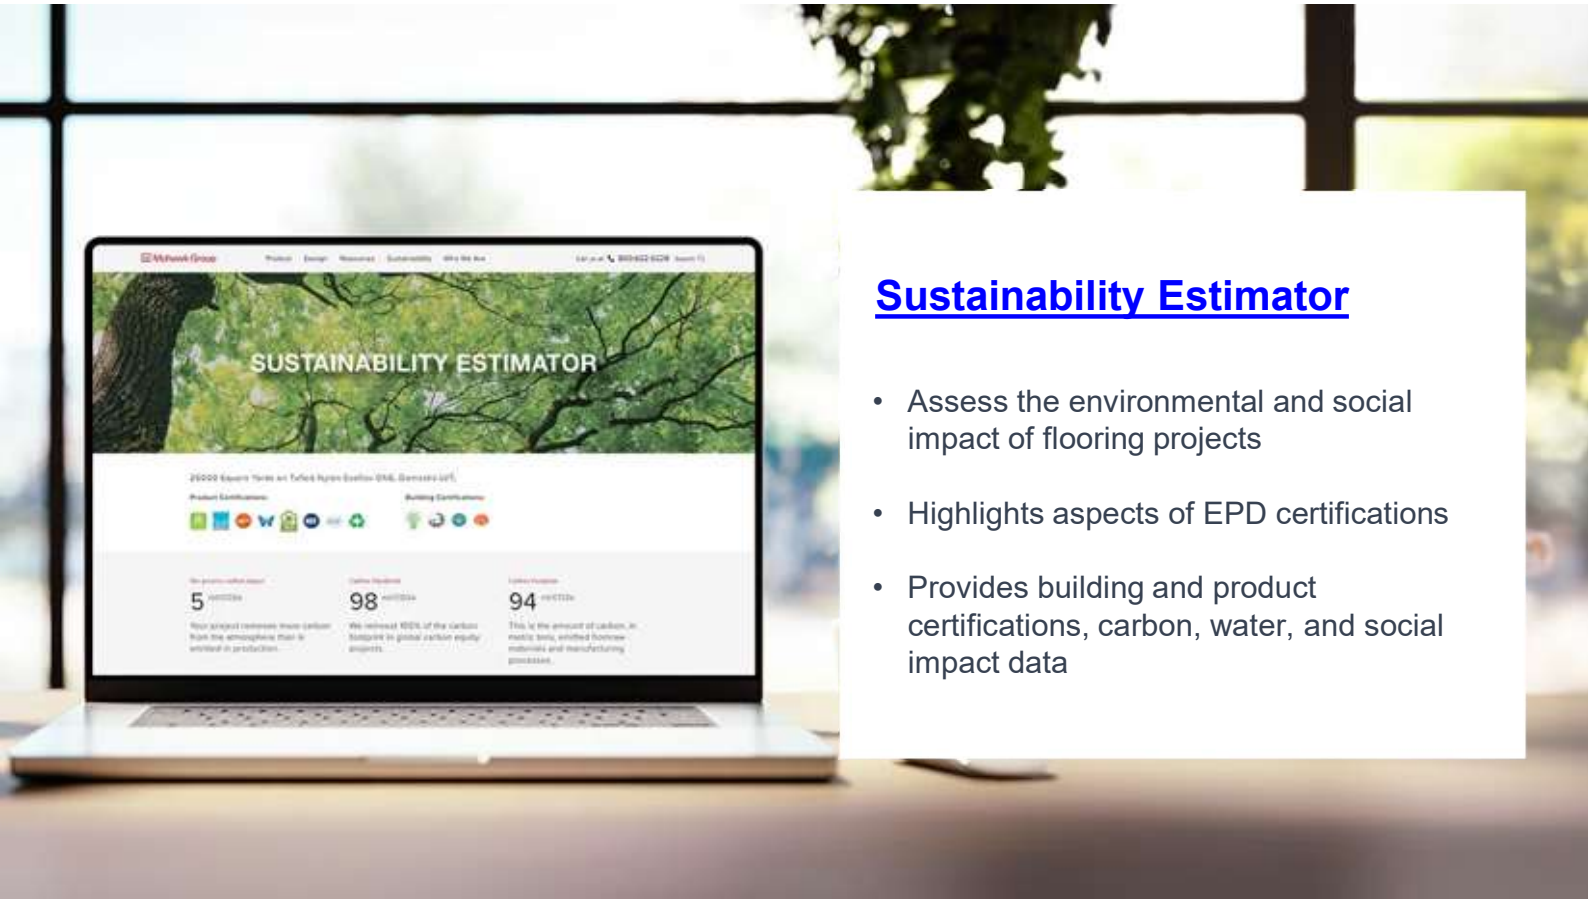

Sustainability Estimator

- Assess the environmental and social impact of flooring projects
- Highlights aspects of EPD certifications
- Provides building and product certifications, carbon, water, and social impact data

Check out the Sustainability Estimator

https://www.mohawkgroup.com/estimator

Mohawk Group

LIFETIME WARRANTY

Commercial Carpet Tile

LIMITED LIFETIME WARRANTY

This limited warranty applies only to the original purchaser of Mohawk Group* carpet tiles for indoor commercial installations. This warranty applies only to product constructed with the following backing and fiber systems:

Backings:

EcoFlex® NXT, EcoFlex® AIR, EcoFlex® Matrix, and EcoFlex® ONE

Fibers:

Colorstrand, Duracolor, Antron or other Mohawk Group nylon fiber systems

The use of Mohawk Group branded adhesives is required to ensure optimum results and are the only approved adhesives warranted by Mohawk Group. Substrates must be prepared using Mohawk Group's recommended floor preparation procedures.

Provided the designated carpet has been properly installed and maintained in the specified commercial location in strict accordance with Mohawk Group's instructions and procedures and subject to the limitations set forth herein, including the specifications and manufacturing tolerances established for the product, Mohawk Group warrants to the original Owner, the following:

I. ITEMS UNDER WARRANTY

Mohawk Group warrants the following for the normal useful life of the carpet**:

1. **Wear** – Carpet tiles will not wear more than 10% of their surface pile weight from abrasive wear. "Abrasive wear" means fiber loss from the carpet through normal abrasion, not crushing or flattening of the carpet pile in any area, nor staining, soiling, fading, or change in carpet appearance, nor fiber loss due to abnormal usage of the carpet;
2. **Static** – Carpet tiles will not give static discharges in excess of 3.5 KV when tested under the step portion of AATCC Test Method 134 (Step);
3. **Edge Ravel/Zippering** – Carpet tiles will not edge ravel or zipper.
4. **Delamination** – Carpet tiles will not delaminate (chair pads are recommended for maximum appearance retention and to deter delamination);
5. **Dimensional Stability** – Carpet tiles will not lose their dimensional stability per the AACHEN test ISO 2551.

II. LIMITATIONS – THIS WARRANTY DOES NOT COVER

1. Disfigurement or damage caused by abnormal use or any damage to the carpet not arising out of a manufacturing defect in the carpet, including such disfigurement or damage as tears, burns, pulls, cuts, floods, excessive alkalinity, excessive moisture, installation on stairs, damage resulting from improper cleaning agents or methods, neglect, or damage in transit;
2. Edge ravel where carpet is cut for access to floor outlets and around trench header ducts;
3. Abuse by any athletic equipment such as roller skates, ski boots, or golf shoes;
4. Differential fading from light exposure, shading, pile crush, dye lot differences, or soiling;
5. Any condition that would have been visible upon inspection prior to the installation;
6. Any condition resulting from other than ordinary wear or from any use for which the product was not designed;
7. Any issues related to moisture and alkalinity in the substrate. Moisture and pH testing are not the responsibility of Mohawk Group.

III. OWNER OBLIGATIONS

1. Ownership is defined as the original purchaser of the floor; original proof of purchase may be required for a claim; this warranty is non-transferrable.
2. The original Owner must submit notice of all claims