



LOOM⁺

Woven Flooring

Commercial | Hospitality | Residential



Goodrich Global
SINCE 1983



LEADER



FQ2701 + FQ2703 | Brick Installation

Technical Specifications

SIZE & PACKING

SIZE	THICKNESS	PCS/BOX	M ² /BOX	KG/M ²
250 x 1000 mm	3 mm	16 pcs/box	4 m ²	5.0
500 x 500 mm				

TEST RESULT

TEST ITEM

Level of use



STANDARD

ISO 10874 / EN 1307

LOOM⁺

33

Fraying



EN 1814

Frayproof

Thermal resistance



ISO 8302

0.02 m² K/W

Castor chair resistance



EN 985

No damage

Dimensional stability



ISO 23999

≤ 0.10%

(Norm: ≤ 0.25%)

Fire resistance



EN 986

Passed

Indoor air quality

EN 13501-1

Bfl-s1

Underfloor heating

EN 12524 / ISO 8302

Suitable

Light fastness



ISO 105-B02

≥ 6

Slip resistance



DIN 51130

R11

EN 13893

DS

Flexibility

ISO 24344

Passed

Impact sound insulation



ISO 10140-3

9 dB

Body Voltage



EN 1815

≤ 2 kV

Squareness & Straightness

ISO 24342

No deviation

ASTM F2055

≤ 0.01 in

Residual indentation



ISO 24343-1

≤ 0.1 mm

ASTM F1914

< 8%

Resistance to chemicals

ISO 26987

No defects

ASTM F925

No defects

Limited Wear Warranty

Commercial

10 years

Residential

15 years

SGBC

Leader

CERTIFICATIONS



SGBP 3251

CAUTION

Condition at a minimum of 19°C or the normal room temperature where the product is to be laid, for at least 48 hours before installation. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. Site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims if these instructions are not followed.

LOOM⁺ TECHNOLOGY

Proven Innovation



Distinguished NOX EMT™ Core Multi-layer Property

features innovative functionality and safety,
proven in more than 50 countries for over 20 years.



Safe

Certified non-toxic, phthalate-free,
and fibreglass-free fabric



Silent & Soft

Soft surface helps absorb sound



Non-Slip

Slip-resistant woven surface




Colourfast

Colourfast properties help retain
the original colours over time

Performance

Highlights

Engineered woven flooring built for
performance, durability, and style.

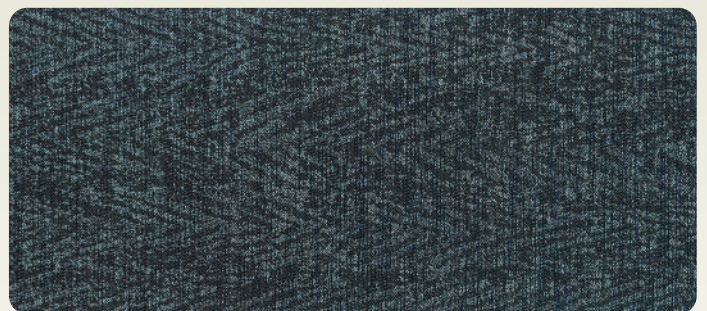

Clean & Tough

- ✦ The first and only woven flooring with NOX EPT™ Shield treatment (Antibacterial)
- ✦ Strong enough for heavy commercial use.



Dimensional Stability & Consistent Thickness

- ✦ Reliable NOX EMT™ Core structure
- ✦ Consistent product thickness for mix-and-match applications across different patterns.



Fray-Proof

- ✦ Clean-cut finishing helps prevent fraying during tile cutting and installation.

Size 250 x 1000 mm



FQ2601



FQ2603




FQ2604



FQ2605

Size 250 x 1000 mm

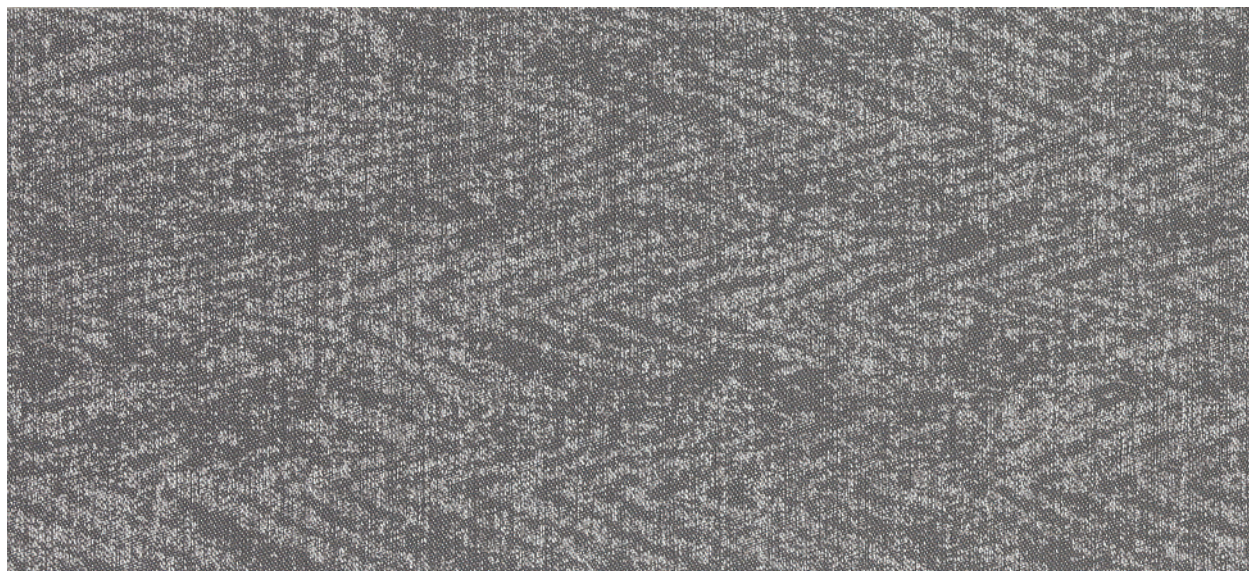

FQ2502



FQ2505



FQ2506

Stocking

Size 500 x 500 mm



FQ2701



FQ2703



FQ2705





FQ2701 + FQ2703 + FQ2705 | Brick Installation

* Images and renderings in this sample book are for illustration purposes and may not represent the real colour.





FQ2601 + FQ2506 | Brick Installation

* Images and renderings in this sample book are for illustration purposes and may not represent the real colour.





FQ2601 + FQ2603 + FQ2604 + FQ2605 | Brick Installation

* Images and renderings in this sample book are for illustration purposes and may not represent the real colour.

Copyright© 11/2026 Goodrich Global. All rights reserved.

Stay Connected - www.goodrichglobal.com | info@goodrichglobal.com

Singapore (HQ) | Malaysia | Thailand | Vietnam | India | Indonesia | United Arab Emirates | Philippines | China | Hong Kong (China)

